

VERIFICATION OF COMPLIANCE

This Verification of Compliance is hereby issued to the below named company and for below described product, based on

Technical Standard : EMC DIRECTIVE 2014/30/EU
(EN 55011 / EN 61000-6-3 / EN 61000-6-1)
(EN 55032 / EN 55024 / EN 55035)

General Information

Applicant : Advantech Co., Ltd.
Address of Applicant : No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District,
Taipei 114, Taiwan, R.O.C.

Product Description

Product Name : DRAM MEMORY
Brand Name : ADVANTECH
Model Number : SQR-SD4N8G3K2SNBCB; SQR-SD4XXX3K2XXXXXXXXXXXXXXXXXX
(where "X" may be any alphanumeric character, "-" or blank)

Measurement Standard

E EN 55011: 2016 + A1: 2017 (Group 1, Class B)
EN 55032: 2015 / AC: 2016
CISPR 32: 2015 (Ed 2.0) / C1: 2016
EN 61000-6-3: 2007 + A1: 2011 / AC: 2012
EN 61000-6-1: 2007 (EN 55024: 2010 + A1: 2015; EN 55035: 2017),
(IEC 61000-4-2: 2008; IEC 61000-4-3: 2006 + A1: 2007 + A2: 2010; IEC 61000-4-4: 2012; IEC 61000-4-5: 2014 + A1: 2017;
IEC 61000-4-6: 2013 + COR1: 2015; IEC 61000-4-8: 2009; IEC 61000-4-11: 2004 + A1: 2017)

Measurement Facilities

Company Name : Compliance Certification Services Inc.
Test Laboratory : Xindian Lab.
Address of Test Lab. : No.163-1, Jhongsheng Rd., Xindian Dist., New Taipei City, 23151 Taiwan.

This device has been tested and found to be in compliance with the measurement procedures specified in the Standards & Specifications listed above and as indicated in the measurement report with the number:
T191005D06-E / T191005D06-E1

The test results shown in this report are applicable only to the investigated sample identified in this report.

Sam Hu / Assistant Manager
Date: October 28, 2019

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

CE EMC TEST REPORT

for

DRAM MEMORY

MODEL: SQR-SD4N8G3K2SNBCB; SQR-SD4XXX3K2XXXXXXXXXXXXXXXXXXXXX
(where "X" may be any alphanumeric character, "-" or blank)

Issued to:

Advantech Co., Ltd.

**No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District,
Taipei 114, Taiwan, R.O.C.**

Issued by:

Compliance Certification Services Inc.

Xindian Lab.

**No.163-1, Jhongsheng Rd., Xindian Dist.,
New Taipei City, 23151 Taiwan.**

TEL: 886-2-22170894

FAX: 886-2-22171029

Issued Date: October 28, 2019

Note: This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T191005D06-E1

Page: 2 / 86
Rev.: 00

Revision History

Rev.		Issue Date		Revisions	Effect Page	Revised By
00		October 28, 2019		Initial Issue	ALL	Wendy Wang

TABLE OF CONTENTS

1	TEST CERTIFICATION	4
2	TEST RESULT SUMMARY	5
3	EUT DESCRIPTION	6
4	TEST METHODOLOGY	7
4.1.	DECISION OF FINAL TEST MODE	7
4.2.	EUT SYSTEM OPERATION	7
5	SETUP OF EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF SUPPORT UNITS	8
5.2.	CONFIGURATION OF SYSTEM UNDER TEST	8
6	FACILITIES AND ACCREDITATIONS	9
6.1.	FACILITIES	9
6.2.	ACCREDITATIONS	9
6.3.	MEASUREMENT UNCERTAINTY	9
7	EMISSION TEST	10
7.1.	CONDUCTED EMISSION MEASUREMENT	10
7.2.	REQUIREMENTS FOR ASYMMETRIC MODE CONDUCTED EMISSIONS	18
7.3.	RADIATED EMISSION MEASUREMENT	21
7.4.	CONDUCTED DIFFERENTIAL VOLTAGE EMISSIONS FROM CLASS B EQUIPMENT	34
7.5.	HARMONICS CURRENT MEASUREMENT	39
7.6.	VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT	41
8	IMMUNITY TEST	43
8.1.	GENERAL DESCRIPTION	43
8.2.	GENERAL PERFORMANCE CRITERIA DESCRIPTION	45
8.3.	ELECTROSTATIC DISCHARGE (ESD)	46
8.4.	RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD (RS)	54
8.5.	ELECTRICAL FAST TRANSIENT (EFT)	60
8.6.	SURGE IMMUNITY TEST	66
8.7.	CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)	70
8.8.	POWER FREQUENCY MAGNETIC FIELD	74
8.9.	VOLTAGE DIP & VOLTAGE INTERRUPTIONS	78
9	PHOTOGRAPHS OF THE TEST CONFIGURATION	82
APPENDIX 1 - PHOTOGRAPHS OF EUT		A1-1

1 TEST CERTIFICATION

Product: DRAM MEMORY**Model:** SQR-SD4N8G3K2SNBCB; SQR-SD4XXX3K2XXXXXXXXXXXXXXXXXX
(where "X" may be any alphanumeric character, "-" or blank)**Brand:** ADVANTECH**Applicant:** Advantech Co., Ltd.
No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District,
Taipei 114, Taiwan, R.O.C.**Manufacturer:** Advantech Co., Ltd.
No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District,
Taipei 114, Taiwan, R.O.C.**Tested:** October 18, 2019**Applicable Standards:** EN 55011: 2016 + A1: 2017 (Group 1, Class B)
EN 55032: 2015 / AC: 2016
CISPR 32: 2015 (Ed 2.0) / C1: 2016
EN 61000-6-3: 2007 + A1: 2011 / AC: 2012

EN 55035: 2017

EN 61000-6-1: 2007

IEC 61000-4-2: 2008

IEC 61000-4-3: 2006 + A1: 2007 + A2: 2010

IEC 61000-4-4: 2012

IEC 61000-4-5: 2014 + A1: 2017

IEC 61000-4-6: 2013 + COR1: 2015


IEC 61000-4-8: 2009

IEC 61000-4-11: 2004 + A1: 2017


Statements of Conformity

Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

The above equipment was tested by Compliance Certification Services Inc. for compliance with the requirements of technical standards specified above under the EMC Directive 2014/30/EU. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Sam Hu
Assistant Manager

Reviewed by:

Eva Fan
Supervisor of report document dept.

2 TEST RESULT SUMMARY

EMISSION			
Standard	Item	Result	Remarks
EN 55032: 2015 / AC: 2016 CISPR 32: 2015 (Ed 2.0) / C1: 2016	Conducted (Power Port)	PASS	Meet Class B limit
	Conducted (Wired network port)	N/A	Please see the page 20
	Radiated	PASS	Meet Class B limit
	Radiated emissions from FM receivers	N/A	Please see the page 33
	Conducted differential voltage emissions from Class B equipment	N/A	Please see the page 38

EMISSION			
Standard	Item	Result	Remarks
EN 55011: 2016 + A1: 2017 (Group 1, Class B) EN 61000-6-3: 2007 + A1: 2011 / AC: 2012	Conducted (Power Port)	PASS	Meet limit
	Conducted (Telecom port)	N/A	Please see the page 20
	Radiated	PASS	Meet limit

IMMUNITY [EN 55035: 2017]				
Standard	Item	Result	Level	Remarks
IEC 61000-4-2: 2008	ESD	PASS	Air: Level 3 Contact: Level 2	Meets the requirements of Performance Criterion A
IEC 61000-4-3: 2006 + A1: 2007 + A2: 2010	RS	PASS	Level 2	Meets the requirements of Performance Criterion A
IEC 61000-4-4: 2012	EFT	PASS	AC Power: Level 2	Meets the requirements of Performance Criterion A
IEC 61000-4-5: 2014 + A1: 2017	Surge	N/A	N/A	Please see the page 67
IEC 61000-4-6: 2013 + COR1: 2015	CS	PASS	AC Power: Level 2	Meets the requirements of Performance Criterion A
IEC 61000-4-8: 2009	PFMF	PASS	Level 1	Meets the requirements of Performance Criterion A
IEC 61000-4-11: 2004 + A1: 2017	Voltage dips & voltage variations	N/A	N/A	Please see the page 79

IMMUNITY [EN 61000-6-1: 2007]				
Standard	Item	Result	Level	Remarks
IEC 61000-4-2: 2008	ESD	PASS	Air: Level 3 Contact: Level 2	Meets the requirements of Performance Criterion A
IEC 61000-4-3: 2006 + A1: 2007 + A2: 2010	RS	PASS	Level 2	Meets the requirements of Performance Criterion A
IEC 61000-4-4: 2012	EFT	PASS	AC Power: Level 2	Meets the requirements of Performance Criterion A
IEC 61000-4-5: 2014 + A1: 2017	Surge	N/A	N/A	Please see the page 69
IEC 61000-4-6: 2013 + COR1: 2015	CS	PASS	AC Power: Level 2	Meets the requirements of Performance Criterion A
IEC 61000-4-8: 2009	PFMF	PASS	Level 2	Meets the requirements of Performance Criterion A
IEC 61000-4-11: 2004 + A1: 2017	Voltage dips & voltage variations	N/A	N/A	Please see the page 81

3 EUT DESCRIPTION

Product	DRAM MEMORY
Brand Name	ADVANTECH
Model	SQR-SD4N8G3K2SNBCB; SQR-SD4XXX3K2XXXXXXXXXXXXXXXXXX (where "X" may be any alphanumeric character, "-" or blank)
Applicant	Advantech Co., Ltd.
Housing material	N/A
Identify Number	T191005D06
Received Date	October 5, 2019
EUT Power Rating	1.2VDC from Computer
AC Power During Test	230VAC / 50Hz to Computer

Model Differences

Model	Difference	Tested (Check)
SQR-SD4N8G3K2SNBCB	Original	☒
SQR-SD4XXX3K2XXXXXXXXXXXXXXXXXX	1. where "X" may be any alphanumeric character, "-" or blank 2. For marketing purpose only	☐

I/O PORT

I/O PORT TYPES	Q'TY	TESTED WITH

Note: Client consigns only one model sample to test (Model Number: SQR-SD4N8G3K2SNBCB).

4 TEST METHODOLOGY

4.1. DECISION OF FINAL TEST MODE

The EUT was tested together with the below additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The test configuration modes are as the following:

Conduction Modes:

No.	Standard	Operate State
1	EN 55032	Normal Mode
2	EN 55011 + EN 61000-6-3	

Radiation Modes:

No.	Standard	Operate State
1	EN 55032	Normal Mode
		Normal Mode / 1-6GHz
2	EN 55011 + EN 61000-6-3	Normal Mode

Worst

Conduction: Mode 1

Radiation: Mode 1

4.2. EUT SYSTEM OPERATION

1. Windows 10 boots system.
2. Run Emctest.exe to activate all peripherals and display "H" pattern on monitor screen.
3. Run Winemc.exe and choose "C:/ & D:/" to test EUT.

Note: Test program is self-repeating throughout the test.

5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


Peripherals Devices:

No.	Equipment	Model No.	Serial No.	FCC ID / BSMI ID	Brand Name	Data Cable	Power Cord
1	Earphone	X710	N/A	N/A	HAWK	Unshielded, 1.5m	N/A
2	USB Mouse	U0004	N/A	DOC BSMI: R41126	Logitech	Shielded, 1.5m	N/A
3	USB Keyboard	Y-U0011	N/A	DOC BSMI: T51160	Logitech	Shielded, 1.5m	N/A
4	USB HDD	HD-EG5	N/A	N/A	SONY	Shielded, 1.8m	N/A
5	Computer	AIMB-2000	N/A	N/A	ADVANTECH	N/A	Unshielded, 1.8m
6	Monitor	PA248Q	N/A	DOC BSMI: R31018	ASUS	Shielded, 1.5m with two cores	Unshielded, 1.8m

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

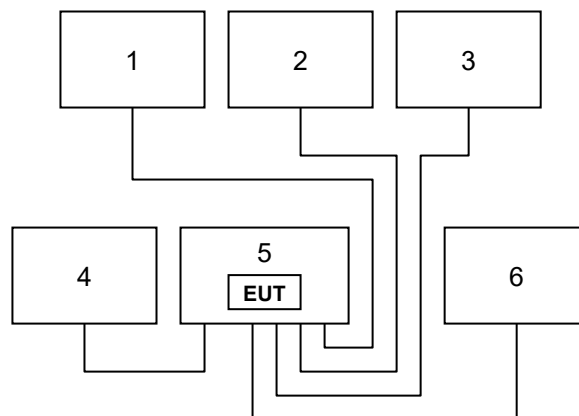

6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at CCSrf Taiwan Xindian Lab. at No.163-1, Jhongsheng Rd., Xindian Dist., New Taipei City, 23151 Taiwan.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4 and CISPR 16-1-5.

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
USA	A2LA

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada
Japan	VCCI
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions (Power port)	0.15MHz ~ 30MHz	± 2.76
Conducted emissions (Wired network port)	0.15MHz ~ 30MHz	N/A
Radiated emissions	30MHz ~ 1000MHz	± 5.24
	1000MHz ~ 6000MHz	± 4.60

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 22: 2005, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than UCISPR which is 3.4dB(AMN); 5dB(AAN); 6.3dB(OATS) respectively. CCS values (called ULab in CISPR 16-4-2) is less than UCISPR as shown in the table above. Therefore, MU need not be considered for compliance.

7 EMISSION TEST

7.1. CONDUCTED EMISSION MEASUREMENT

7.1.1. LIMITS

EN 55032

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

EN 61000-6-3

AC Mains Port

FREQUENCY (MHz)	dBuV	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

DC Power Port

FREQUENCY (MHz)	dBuV	
	Quasi-peak	Average
0.15 - 0.5	79	66
0.50 - 30.0	73	60

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) Applicable only to ports intended for connection to: a local DC power network, or a remote local battery by a connecting cable exceeding a length of 30 m.

EN 55011**CLASS A**

FREQUENCY (MHz)	Group 1 $\leq 20\text{kV}$		Group 1 $> 20\text{kV}$ / Group 2 $\leq 20\text{kV}$		Group 2 $> 20\text{kV}$	
	Quasi-peak (dBuV)	Average (dBuV)	Quasi-peak (dBuV)	Average (dBuV)	Quasi-peak (dBuV)	Average (dBuV)
0.15 - 0.5	79	66	100	90	130	120
0.50 - 5.0	73	60	86	76	125	115
5.0 - 30.0	73	60	90 Decreasing linearly with logarithm of frequency to 73	80 60	115	105

NOTE: The lower limit shall apply at the transition frequencies.
Care should be taken to comply with leakage current requirements.

CLASS B

FREQUENCY (MHz)	Group 1 & 2	
	Quasi-peak (dBuV)	Average (dBuV)
0.15 - 0.5	66 Decreasing linearly with logarithm of frequency to 56	56 Decreasing linearly with logarithm of frequency to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE: The lower limit shall apply at the transition frequencies.
Care should be taken to comply with leakage current requirements.

7.1.2. TEST INSTRUMENTS

Conducted Emission room # A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Attenuator	EMEC	EM-ATT-3000-10-005-BB	SD-C011	03/25/2020
BNC CABLE	EMEC	EMG178	BNC#A9	03/25/2020
EMI Test Receiver	R&S	ESCI	101201	09/17/2020
LISN	Schwarzbeck	NNLK 8129	8129-286	08/11/2020
LISN(EUT)	Schwarzbeck	NSLK 8127	8127527	08/06/2020
Thermo-Hygro Meter	Wisewind	201A	No. 02	04/29/2020
Test S/W	EZ-EMC			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.

7.1.3. TEST PROCEDURES (please refer to measurement standard or CCS SOP PA-031 & PA-041)**Procedure of Preliminary Test****EN 55032**

- The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per EN 55032 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor standing equipment, it is placed on the ground plane, which has a 15 cm non-conductive covering to insulate the EUT from the ground plane.
- All I/O cables were positioned to simulate typical actual usage as per EN 55032.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane.
- All support equipment power received from a second LISN.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- During the above scans, the emissions were maximized by cable manipulation.
- The test mode(s) described in Item 4.1 were scanned during the preliminary test.
- After the preliminary scan, we found the test mode described in Item 4.1 producing the highest emission level.
- The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test

Procedure of Final Test

- EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- The test data of the worst-case condition(s) was recorded.

Procedure of Preliminary Test**EN 61000-6-3**

- The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per CISPR 16-2-1, 7.4.1 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor standing equipment, it is placed on the ground plane, which has a non-conductive covering (up to 12 mm) to insulate the EUT from the ground plane.
- All I/O cables were positioned to simulate typical actual usage as per CISPR 16-2-1, 7.4.1.
- The test equipment EUT installed received AC main power or DC Power source, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane.
- All support equipment power received from a second LISN.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- During the above scans, the emissions were maximized by cable manipulation.
- The test mode(s) described in Item 4.1 were scanned during the preliminary test.
- After the preliminary scan, we found the test mode described in Item 4.1 producing the highest emission level.
- The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

Procedure of Final Test


- EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- The test data of the worst-case condition(s) was recorded.

Procedure of Preliminary Test**EN 55011**

- The EUT and Support equipment, if needed, was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per EN 55011 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor standing equipment, it is placed on the ground plane, which has a 15 cm non-conductive covering to insulate the EUT from the ground plane.
- All I/O cables were positioned to simulate typical actual usage as per EN 55011.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane.
- All support equipment power received from a second LISN.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes.
- During the above scans, the emissions were maximized by cable manipulation.
- The test mode(s) described in Item 4.1 were scanned during the preliminary test.
- After the preliminary scan, we found the test mode described in Item 4.1 producing the highest emission level.
- The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

Procedure of Final Test

- EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- The test data of the worst-case condition(s) was recorded.

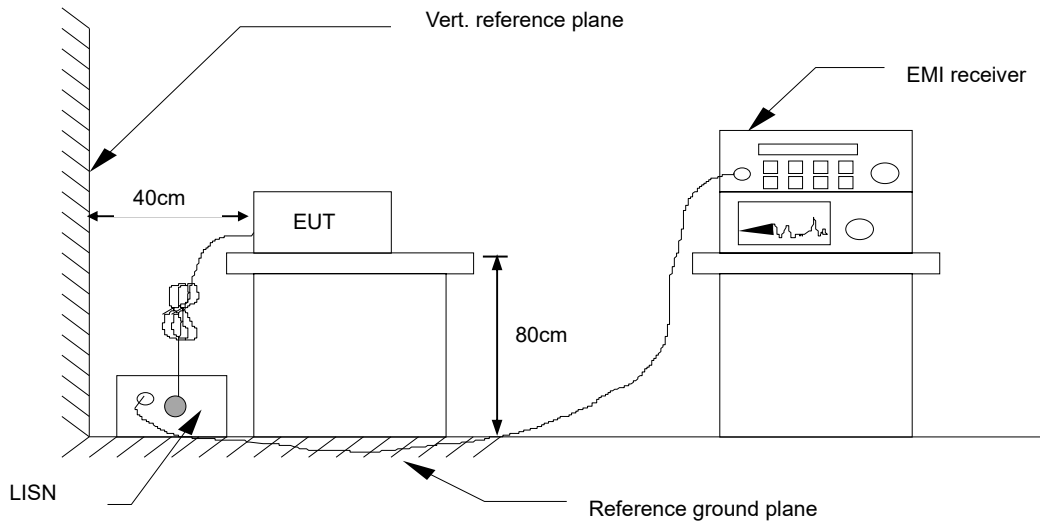7.1.4. TEST SETUP

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.5. DATA SAMPLE

Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
x.xx	42.95	0.55	43.50	56	-12.50	Q	L1


Freq. = Emission frequency in MHz
 Reading = Uncorrected Analyzer/Receiver reading
 Factor = Insertion loss of LISN + Cable Loss + Pulse Limit
 Result = Reading + Factor
 Limit = Limit stated in standard
 Margin = Reading in reference to limit
 P = Peak Reading
 Q = Quasi-peak Reading
 A = Average Reading
 L1 = Hot side
 L2 = Neutral side

Calculation Formula

Margin (dB) = Result (dBuV) – Limit (dBuV)

7.1.6. TEST RESULTS


Model No.	SQR-SD4N8G3K2SNBCB	6dB Bandwidth	9 kHz
Environmental Conditions	25°C, 58% RH	Test Mode	Mode 1
Tested by	Lion Lee	Phase	L1
Standard	EN 55032 CLASS B		

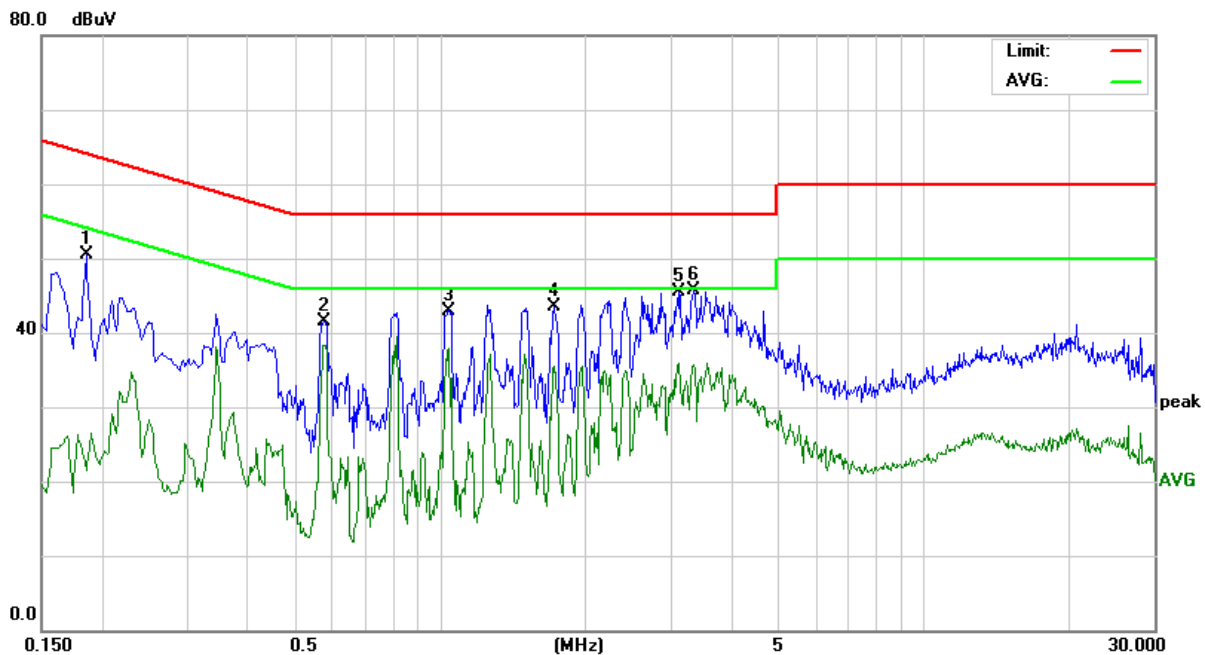

Conducted Emission Readings							
Frequency Range Investigated				150 kHz to 30 MHz			
Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
0.1860	40.42	10.07	50.49	64.21	-13.72	P	L1
0.5780	31.35	10.12	41.47	56.00	-14.53	P	L1
1.0460	32.84	10.16	43.00	56.00	-13.00	P	L1
1.7180	33.24	10.22	43.46	56.00	-12.54	P	L1
3.1340	35.23	10.33	45.56	56.00	-10.44	P	L1
3.3580	35.38	10.34	45.72	56.00	-10.28	P	L1

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Model No.	SQR-SD4N8G3K2SNBCB	6dB Bandwidth	9 kHz
Environmental Conditions	25°C, 58% RH	Test Mode	Mode 1
Tested by	Lion Lee	Phase	L2
Standard	EN 55032 CLASS B		

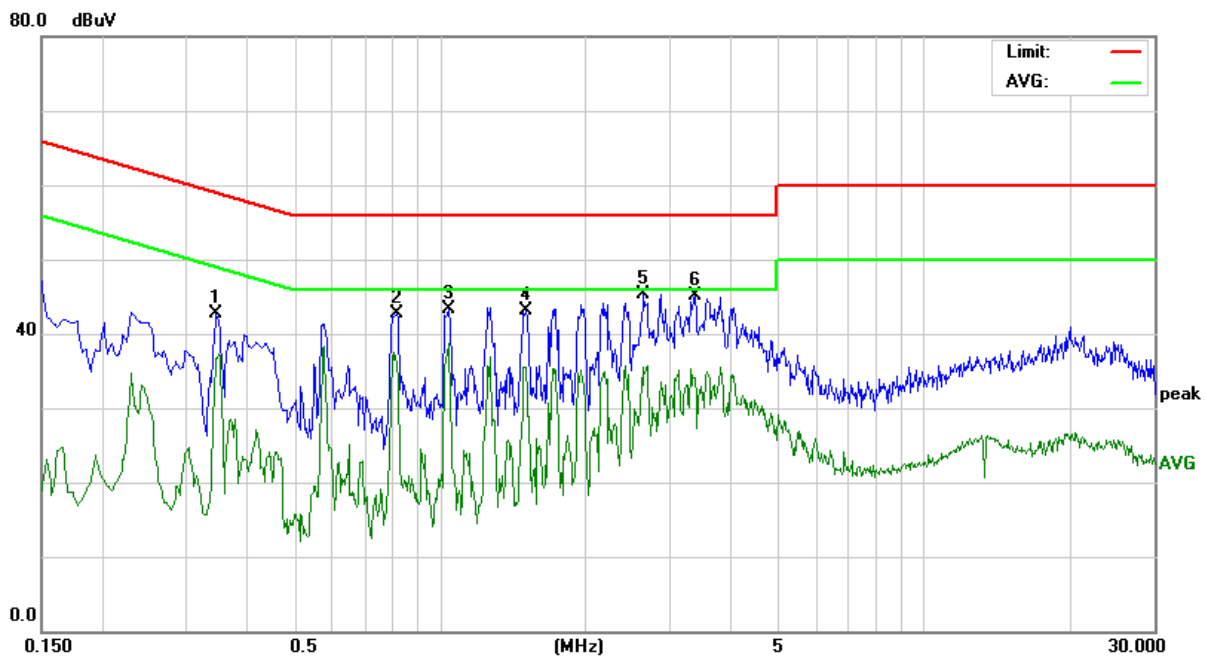

Conducted Emission Readings							
Frequency Range Investigated				150 kHz to 30 MHz			
Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)	Line (L1/L2)
0.3460	32.63	10.10	42.73	59.06	-16.33	P	L2
0.8139	32.67	10.13	42.80	56.00	-13.20	P	L2
1.0460	33.15	10.15	43.30	56.00	-12.70	P	L2
1.5100	32.82	10.20	43.02	56.00	-12.98	P	L2
2.6460	34.97	10.27	45.24	56.00	-10.76	P	L2
3.3660	34.78	10.32	45.10	56.00	-10.90	P	L2

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

7.2. REQUIREMENTS FOR ASYMMETRIC MODE CONDUCTED EMISSIONS

7.2.1. LIMITS

EN 55032

For Class A Equipment

FREQUENCY (MHz)	Voltage Limit (dBuV)		Current Limit (dBuA)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	97 ~ 87	84 ~ 74	53 ~ 43	40 ~ 30
0.5 ~ 30.0	87	74	43	30

NOTE: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

For Class B Equipment

FREQUENCY (MHz)	Voltage Limit (dBuV)		Current Limit (dBuA)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	84 ~ 74	74 ~ 64	40 ~ 30	30 ~ 20
0.5 - 30.0	74	64	30	20

NOTE: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

EN 61000-6-3

FREQUENCY (MHz)	Voltage Limit (dBuV)		Current Limit (dBuA)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	84 ~ 74	74 ~ 64	40 ~ 30	30 ~ 20
0.5 - 30.0	74	64	30	20

NOTE: The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

7.2.2. TEST INSTRUMENTS

Conducted Emission room #				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.


7.2.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-031)

- Selecting AAN for unscreened cable or a current probe for screened cable to take measurement.
- The port of the EUT was connected to the remote side support equipment through the AAN/Current Probe and communication in normal condition.
- Making a overall range scan by using the test receiver controlled by controller and record at least six highest emissions for showing in the test report.
- Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.
- In case of measuring on the screened cable, the current limit shall be applied; otherwise the voltage limit should be applied.
- The following test mode was scanned during the preliminary test:

N/A

- After the preliminary scan, we found the following test mode(s) producing the highest emission level and test data of the worst case was recorded.

N/A

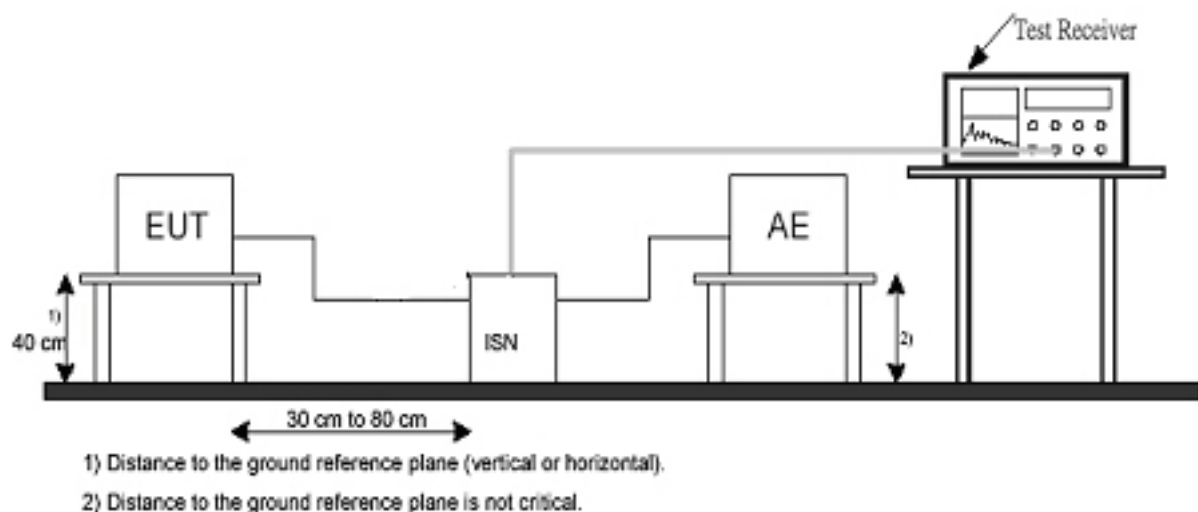7.2.4. TEST SETUP

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.2.5. DATA SAMPLE

Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector (P/Q/A)
x.xx	62.95	0.55	63.50	84	-20.50	Q

Freq. = Emission frequency in MHz
 Reading = Uncorrected Analyzer/Receiver reading
 Factor = Insertion loss of LISN + Cable Loss + Pulse Limit
 Result = Reading + Factor
 Limit = Limit stated in standard
 Margin = Reading in reference to limit
 P = Peak Reading
 Q = Quasi-peak Reading
 A = Average Reading

Calculation Formula

Margin (dB) = Result (dBuV) – Limit (dBuV)

7.2.6. TEST RESULTS

Model No.	N/A	6dB Bandwidth	N/A
Environmental Conditions	N/A	Test Mode	N/A
Tested by	N/A		

Note: No applicable, the EUT doesn't have LAN port or Modem port.

7.3. RADIATED EMISSION MEASUREMENT

7.3.1. LIMITS

EN 55032

Below 1GHz

FREQUENCY (MHz)	dBuV/m (At 10m)		dBuV/m (At 3m)	
	Class A	Class B	Class A	Class B
30 ~ 230	40	30	50	40
230 ~ 1000	47	37	57	47

Above 1GHz

Frequency (MHz)	Class A (dBuV/m) (At 3m)		Class B (dBuV/m) (At 3m)	
	Average	Peak	Average	Peak
1000 ~ 3000	56	76	50	70
3000 ~ 6000	60	80	54	74

NOTE: The lower limit shall apply at the transition frequencies.

According to EN 55032: 2015 / AC: 2016 Table 1 the measurement frequency range shown in the following table:

Table 1 – Required highest frequency for radiated measurement

Highest internal frequency (F_X)	Highest internal frequency
$F_X \leq 108$ MHz	1 GHz
$108 \text{ MHz} < F_X \leq 500$ MHz	2 GHz
$500 \text{ MHz} < F_X \leq 1$ GHz	5 GHz
$F_X > 1$ GHz	$5 \times F_X$ up to a maximum of 6 GHz
NOTE 1 For FM and TV broadcast receivers, F_X is determined from the highest frequency generated or used excluding the local oscillator and tuned frequencies.	
NOTE 2 F_X is defined in 3.1.19.	

Where F_X is unknown, the radiated emission measurements shall be performed up to 6 GHz.

Radiated emissions from FM receivers

Frequency range MHz	Measurement		Class B limit dB(μV/m)	
	Distance m	Detector type / bandwidth	Fundamental	Harmonics
			OATS / SAC (see Table A.1)	OATS / SAC (see Table A.1)
30 – 230	10	Quasi peak/ 120kHz	50	42
230 – 300				42
300 – 1000				46
30 – 230	3		60	52
230 – 300				52
300 – 1000				56
These relaxed limits apply only to emissions at the fundamental and harmonic frequencies of the local oscillator. Signals at all other frequencies shall be compliant with the limits given in 7.3.1 Class B Limit				

EN 61000-6-3**Below 1GHz**

FREQUENCY (MHz)	dBuV/m (At 10m)
30 ~ 230	30
230 ~ 1000	37

Above 1GHz

Frequency (MHz)	dBuV/m (At 3m)	
	Average	Peak
1000 ~ 3000	50	70
3000 ~ 6000	54	74

NOTE: The lower limit shall apply at the transition frequencies.

Highest frequency generated or used within the EUT or on which the EUT operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Less than 108	1000
108-500	2000
500-1000	5000
Above 1000	If the highest internal frequency of the EUT is above 1 GHz, the measurement shall be made up to 6 GHz

EN 55011

FREQUENCY (MHz)	Measured on a test site		
	Group 1, class A $\leq 20\text{kV}$	Group 1, class A $> 20\text{kV}$	Group 1, class B
	Quasi-peak (dBuV/m)	Quasi-peak (dBuV/m)	Quasi-peak (dBuV/m)
0.15 - 30	Under consideration	Under consideration	Under consideration
30 - 230	40	50	30
230 - 1000	47	57	37

7.3.2. TEST INSTRUMENTS

Open Area Test Site # H				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Bilog Antenna	Teseq	CBL 6112D	40529	08/29/2020
Cable	EMEC	CFD400NL-LW	N-Type#H11	08/14/2020
EMI Test Receiver	R&S	ESCI	101340	03/19/2020
Pre-Amplifier	HP	8447D	1937A01554	09/26/2020
Thermo-Hygro Meter	Wisewind	201A	No. 03	05/21/2020
Test S/W	EZ-EMC			
Above 1GHz Used				
Horn Antenna	ETS	3117	00139062	08/07/2020
K-Type Cable	Rosnol	K1K50-UP0264-K1k50-1000	170803-1	08/06/2020
Microflex Cable	EMEC	EM104-7M	SD-R051	08/06/2020
Pre-Amplifier	Com-Power	PAM-118A	551041	06/17/2020
Signal Analyzer	R&S	FSV40	101269	03/29/2020
Test S/W	EZ-EMC			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.

7.3.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-031 & PA-041)**Procedure of Preliminary Test****EN 55032**

- The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 15 cm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per EN 55032.
- All I/O cables were positioned to simulate typical usage as per EN 55032.
- The EUT received AC power source from the outlet socket under the turntable. All support equipment power received from another socket under the turntable.
- The antenna was placed at 3 or 10 meter away from the EUT as stated in EN 55032. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.
- The Analyzer / Receiver quickly scanned from 30MHz to 6000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- The test mode(s) described in Item 4.1 were scanned during the preliminary test:
- After the preliminary scan, we found the test mode described in Item 4.1 producing the highest emission level.
- The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

Procedure of Final Test

- EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.
- The Analyzer / Receiver scanned from 30MHz to 6000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. Below 1GHz the Q.P. reading and above 1GHz the Peak and Average reading are presented.
- The test data of the worst-case condition(s) was recorded.

Procedure of Preliminary Test**EN 61000-6-3**

- The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 15 cm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per CISPR 16-2-3.
- All I/O cables were positioned to simulate typical usage as per CISPR 16-2-3.
- The EUT received AC power source from the outlet socket under the turntable. All support equipment power received from another socket under the turntable.
- The antenna was placed at 3 or 10 meter away from the EUT as stated in per CISPR 16-2-3. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.
- The Analyzer / Receiver quickly scanned from 30MHz to 6000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- The test mode(s) described in Item 4.1 were scanned during the preliminary test:
- After the preliminary scan, we found the test mode described in Item 4.1 producing the highest emission level.
- The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.

Procedure of Final Test

- EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.
- The Analyzer / Receiver scanned from 30MHz to 6000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. Below 1GHz the Q.P. reading and above 1GHz the Peak and Average reading are presented.
- The test data of the worst-case condition(s) was recorded.

Procedure of Preliminary Test**EN 55011**

- The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 15 cm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per EN 55011.
- All I/O cables were positioned to simulate typical usage as per EN 55011.
- The EUT received AC power source from the outlet socket under the turntable. All support equipment power received from another socket under the turntable.
- The antenna was placed at 10 meter away from the EUT as stated in EN 55011. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.
- The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- The test mode(s) described in Item 4.1 were scanned during the preliminary test:
- After the preliminary scan, we found the test mode described in Item 4.1 producing the highest emission level.
- The EUT and cable configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for the final test.


Procedure of Final Test

- EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.
- The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.
- The test data of the worst-case condition(s) was recorded.

7.3.4. TEST SETUP


EN 55032 / EN 55011 / EN 61000-6-3

Below 1GHz

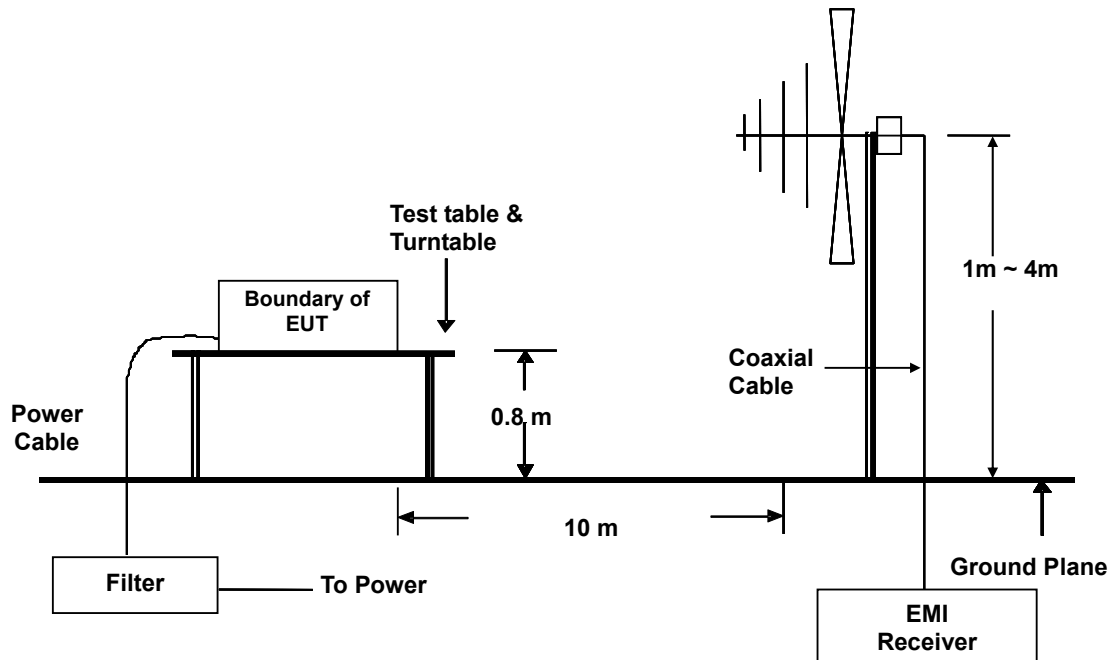

EN 55032 / EN 61000-6-3

Above 1GHz

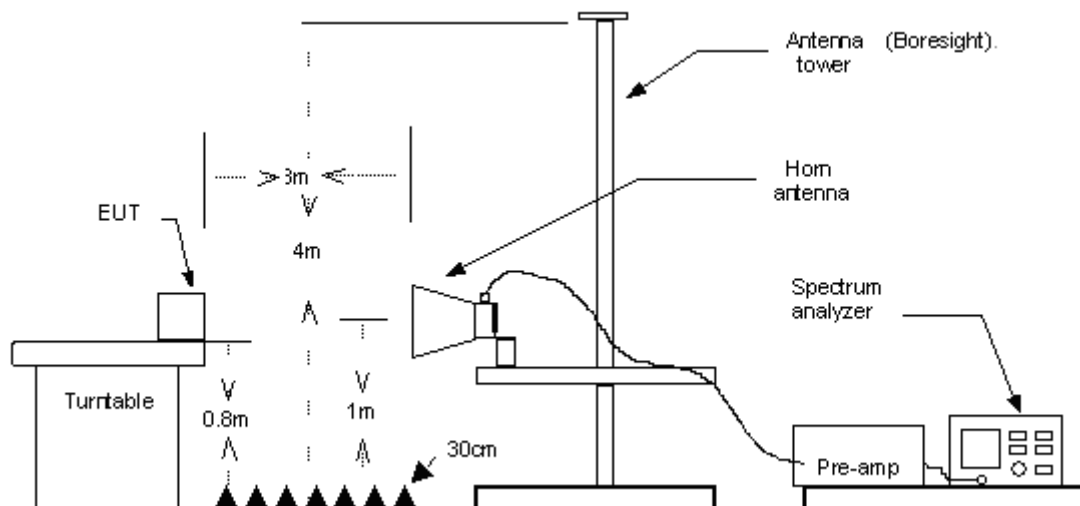

- For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

7.3.5. DATA SAMPLE**Below 1GHz**

Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/Q)	Pol. (H/V)
x.xx	14.0	12.2	26.2	30	-3.8	Q	H

Above 1GHz

Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
x.xx	42.95	0.55	43.50	54	-10.50	A	H

Freq. = Emission frequency in MHz
 Reading = Uncorrected Analyzer/Receiver reading
 Factor = Antenna Factor + Cable Loss - Amplifier Gain
 Result = Reading + Factor
 Limit = Limit stated in standard
 Margin = Reading in reference to limit
 P = Peak Reading
 Q = Quasi-peak Reading
 A = Average Reading
 H = Antenna Polarization: Horizontal
 V = Antenna Polarization: Vertical


Calculation Formula

Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)

7.3.6. TEST RESULTS

Below 1GHz


Model No.	SQR-SD4N8G3K2SNBCB	Test Mode	Mode 1
Environmental Conditions	26°C, 64% RH	6dB Bandwidth	120 kHz
Antenna Pole	Vertical	Antenna Distance	10m
Detector Function	Quasi-peak.	Tested by	Lion Lee
Standard	EN 55032 CLASS B		

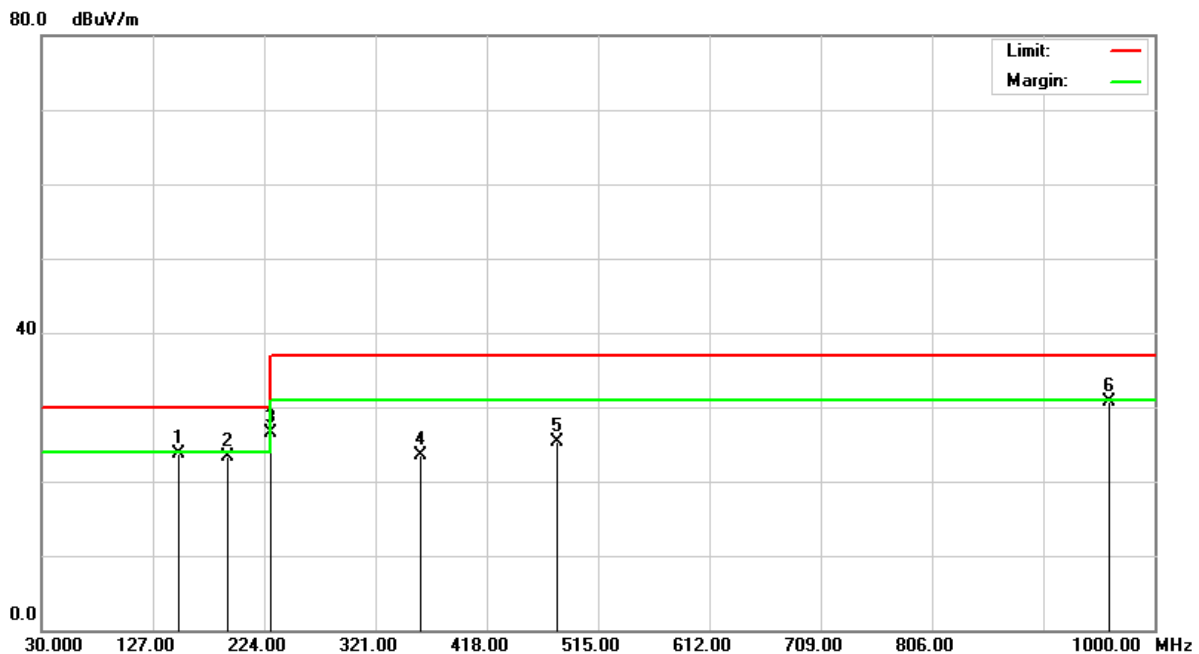

Radiated Emission Readings									
Frequency Range Investigated					30 MHz to 1000 MHz at 10m				
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
150.1179	32.80	-9.09	23.71	30.00	-6.29	100	281	Q	V
192.3049	33.60	-10.34	23.26	30.00	-6.74	100	102	Q	V
229.4200	35.40	-8.98	26.42	30.00	-3.58	100	17	Q	V
360.3800	27.50	-4.07	23.43	37.00	-13.57	100	175	Q	V
480.0790	26.30	-0.93	25.37	37.00	-11.63	400	308	Q	V
960.0880	25.10	5.54	30.64	37.00	-6.36	400	271	Q	V

Note: 1. P= Peak Reading; Q= Quasi-peak Reading.

Model No.	SQR-SD4N8G3K2SNBCB	Test Mode	Mode 1
Environmental Conditions	26°C, 64% RH	6dB Bandwidth	120 kHz
Antenna Pole	Horizontal	Antenna Distance	10m
Detector Function	Quasi-peak.	Tested by	Lion Lee
Standard	EN 55032 CLASS B		

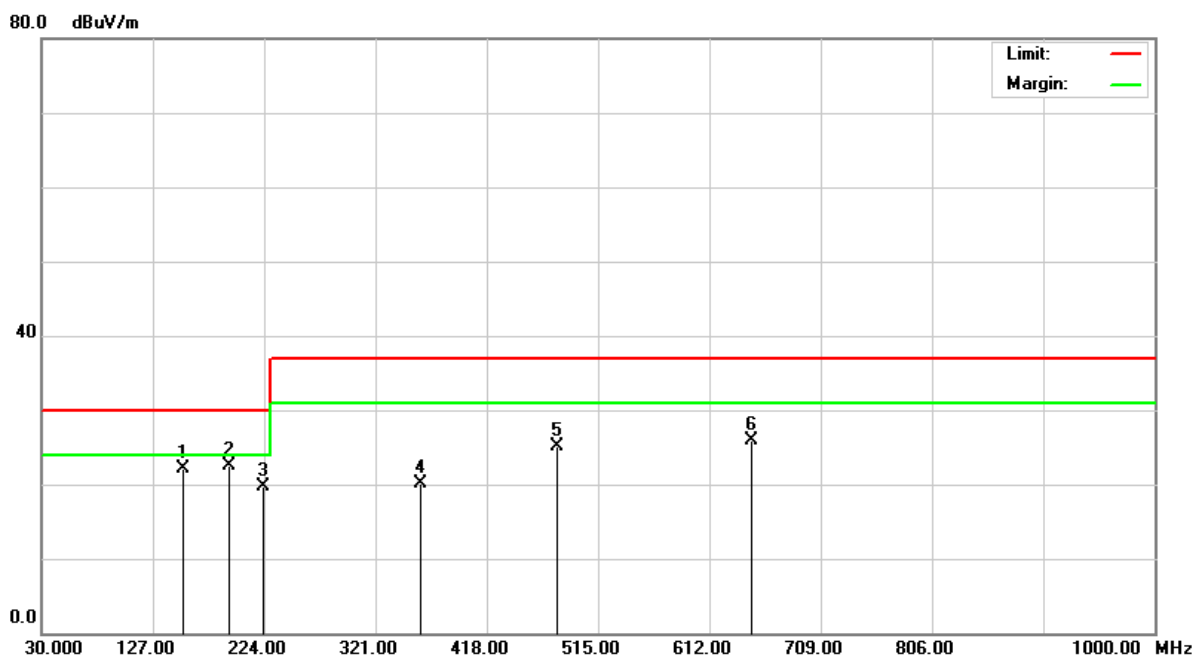


Radiated Emission Readings									
Frequency Range Investigated					30 MHz to 1000 MHz at 10m				
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Detector (P/Q)	Pol. (H/V)
154.1160	31.30	-9.27	22.03	30.00	-7.97	400	172	Q	H
193.2800	32.80	-10.34	22.46	30.00	-7.54	400	262	Q	H
223.4200	29.30	-9.68	19.62	30.00	-10.38	400	180	Q	H
360.4900	24.20	-4.07	20.13	37.00	-16.87	400	218	Q	H
480.0270	26.10	-0.93	25.17	37.00	-11.83	100	257	Q	H
648.8700	24.30	1.67	25.97	37.00	-11.03	100	63	Q	H

Note: 1. P= Peak Reading; Q= Quasi-peak Reading.

Above 1GHz


Model No.	SQR-SD4N8G3K2SNBCB	Test Mode	Mode 1
Environmental Conditions	26°C, 60% RH	6dB Bandwidth	1 MHz
Antenna Pole	Vertical	Antenna Distance	3m
Highest frequency generated or used	3200MHz	Upper frequency	6000MHz
Detector Function	Peak and average.	Tested by	Lion Lee
Standard	EN 55032 CLASS B		

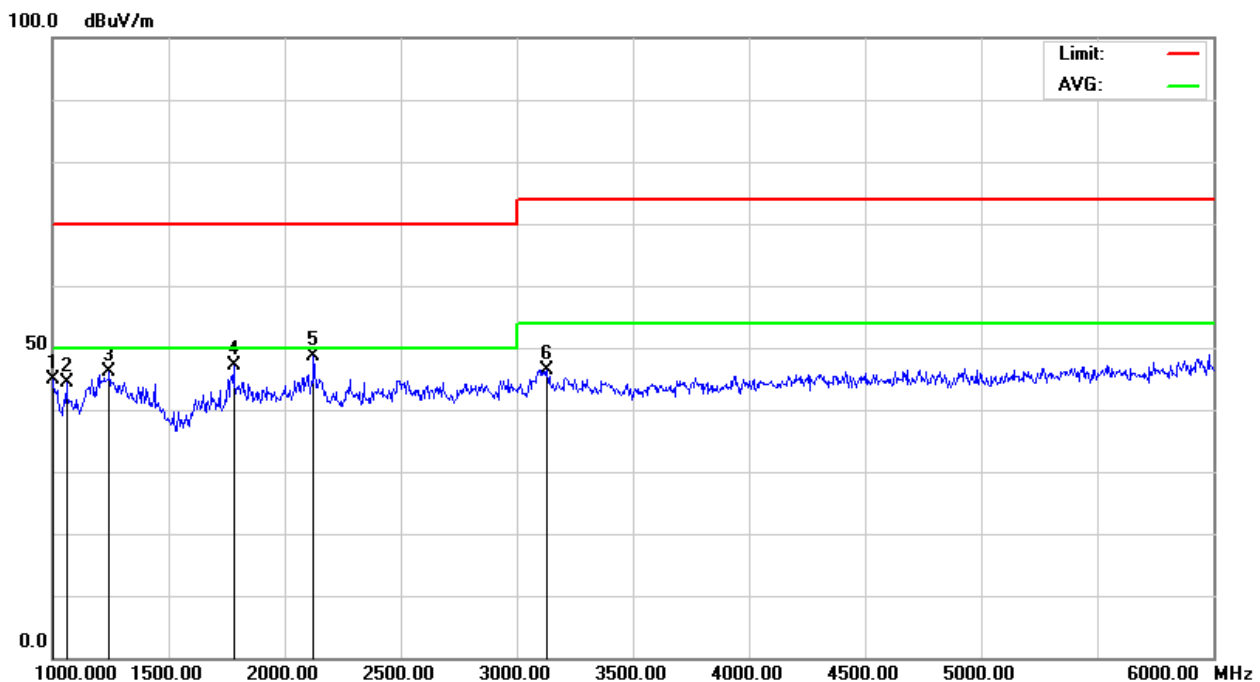

Radiated Emission Readings							
Frequency Range Investigated				Above 1GHz at 3m			
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
1000.000	52.15	-7.17	44.98	70.00	-25.02	P	V
1060.000	51.71	-7.40	44.31	70.00	-25.69	P	V
1245.000	53.01	-6.81	46.20	70.00	-23.80	P	V
1780.000	51.79	-4.73	47.06	70.00	-22.94	P	V
2125.000	52.11	-3.56	48.55	70.00	-21.45	P	V
3130.000	45.95	0.50	46.45	74.00	-27.55	P	V

Note: 1. P= Peak Reading; A= Average Reading.

Model No.	SQR-SD4N8G3K2SNBCB	Test Mode	Mode 1
Environmental Conditions	26°C, 60% RH	6dB Bandwidth	1 MHz
Antenna Pole	Horizontal	Antenna Distance	3m
Highest frequency generated or used	3200MHz	Upper frequency	6000MHz
Detector Function	Peak and average.	Tested by	Lion Lee
Standard	EN 55032 CLASS B		

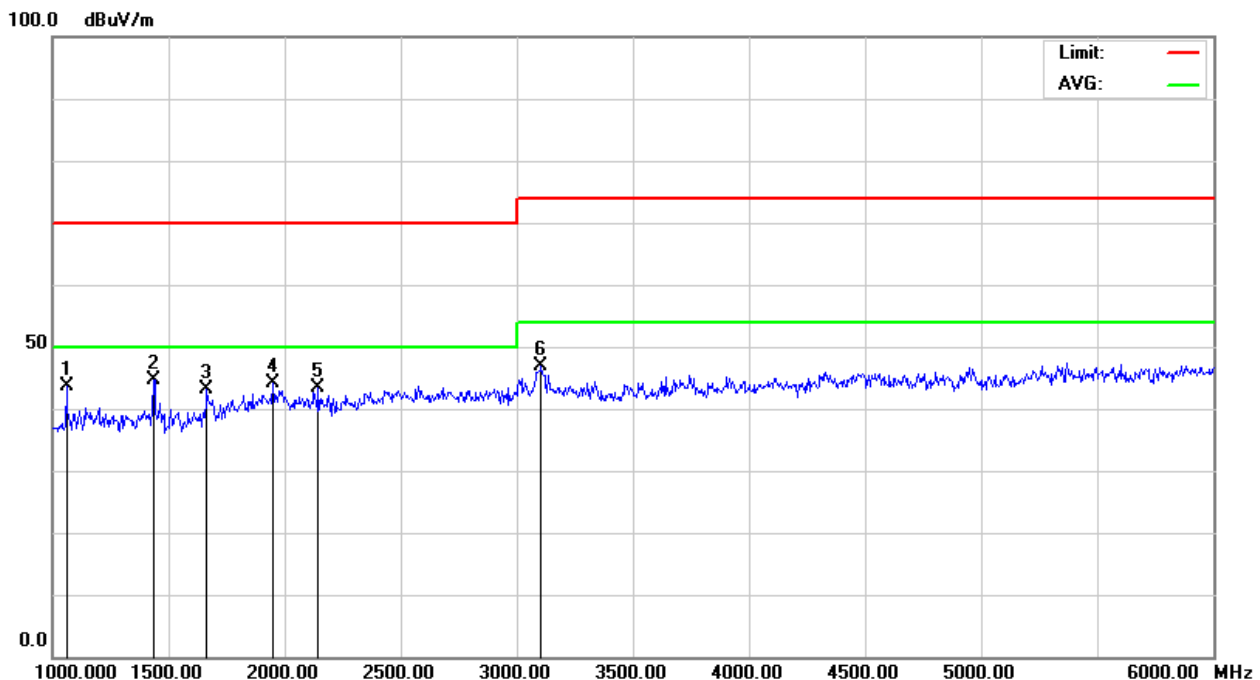

Radiated Emission Readings							
Frequency Range Investigated				Above 1GHz at 3m			
Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector (P/A)	Pol. (H/V)
1060.000	51.07	-7.40	43.67	70.00	-26.33	P	H
1435.000	51.44	-6.79	44.65	70.00	-25.35	P	H
1665.000	49.26	-6.13	43.13	70.00	-26.87	P	H
1950.000	47.53	-3.50	44.03	70.00	-25.97	P	H
2145.000	46.96	-3.56	43.40	70.00	-26.60	P	H
3105.000	44.20	2.59	46.79	74.00	-27.21	P	H

Note: 1. P= Peak Reading; A= Average Reading.



Report No.: T191005D06-E1

Page: 33 / 86
Rev.: 00

Radiated emissions from FM receivers

Model No.	N/A	Test Mode	N/A
Environmental Conditions	N/A	6dB Bandwidth	N/A
Antenna Pole	N/A	Antenna Distance	N/A
Detector Function	N/A	Tested by	N/A

Note: No applicable, the EUT doesn't have FM port.

7.4. CONDUCTED DIFFERENTIAL VOLTAGE EMISSIONS FROM CLASS B EQUIPMENT

Applicable to

1. TV broadcast receiver tuner ports with an accessible connector

2. RF modulator output ports

3. FM broadcast receiver tuner ports with an accessible connector

Frequency range MHz	Class B limits DB(μV) 75 Ω			Applicability
	other	Local Oscillator Fundamental	Local Oscillator Harmonics	
30 – 950	46	46	46	See a)
950 – 2 150	46	54	54	
950 – 2 150	46	54	54	See b)
30 – 300	46	54	50	See c)
300 – 1 000			52	
30 – 300	46	66	59	See d)
300 – 1 000			52	
30 – 950	46	76	46	See e)
950 – 2 150		n/a	54	

a) Television receivers (analogue or digital), video recorders and PC TV broadcast receiver tuner cards working in channels between 30 MHz and 1 GHz, and digital audio receivers.

b) Tuner units (not the LNB) for satellite signal reception.

c) Frequency modulation audio receivers and PC tuner cards.

d) Frequency modulation car radios.

e) Applicable to EUTs with RF modulator output ports (for example DVD equipment, video recorders, camcorders and decoders etc.) designed to connect to TV broadcast receiver tuner ports.

Testing is required at only one EUT supply voltage and frequency.

The term ‘other’ refers to all emissions other than the fundamental and the harmonics of the local oscillator.

The test shall be performed with the device operating at each reception channel.

The test shall cover the entire frequency range.



Report No.: T191005D06-E1

Page: 35 / 86
Rev.: 00

7.4.1. TEST INSTRUMENTS

Conducted Emission room #				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.

7.4.2. TEST PROCEDURES (please refer to measurement standard or CCS SOP PA-041)**Procedure of Preliminary Test**

- The equipment was set up as per the test configuration to simulate typical usage per the user's manual. The EUT was placed on a wooden table with a height of 0.8 meters was used that was placed on the ground plane.
- Support equipment, if needed, was placed as per EN 55032.
- All I/O cables were positioned to simulate typical usage as per EN 55032.
- The EUT received AC power source, from the outlet socket. All support equipment received power was from another socket.
- Added a $75 \longleftrightarrow 50 \Omega$ matching network, between EUT and EMI test receiver to get impedance match condition during the test.
- The output level of the auxiliary signal generator shall be set to give the value of 60 dB (μV) for FM receiver or 70 dB (μV) for TV and VCR to the input of the frequency-modulation or television receiver (or video recorder) respectively, on a 75Ω impedance. An additional amplifier should be inserted at the generator output, if necessary.
- The output level of the auxiliary signal generator shall be a standard TV color bar Move signal for TV receivers and video recorders with sound carrier that defined in Table A12 of EN 55032. An additional amplifier should be inserted at the generator output, if necessary.
- The results shall be expressed in the terms of the substitution voltage in decibels (μV), as supplied by the standard signal generator. The specified source impedance of the receiver shall be stated with the results.
- When measurements are made at the antenna terminals of the EUT, an auxiliary signal generator shall be used to feed the equipment under test input with a standard test signal (see Table A.12 of CISPR 32/ EN 55032) at the receiver tuning frequency (30MHz to 2150MHz).
- The test mode(s) described in Item 4.1 were scanned during the preliminary test:
- After the preliminary scan, we found the test mode described in Item 4.1 producing the highest emission level.
- The EUT and cable configuration of the above highest emission levels were recorded for the final test.

Procedure of Final Test

- EUT and support equipment were set up on the table as per the configuration with highest emission level in the preliminary test.
- The Analyzer / Receiver scanned from 30MHz to 2150MHz. recorded the value, the local frequency, amplitude, were recorded in which correction factors were used to calculate the emission level and compare reading to the applicable limit, and only Q.P reading will record in this report.
- Recorded at least the six highest emissions. Emission frequencies, amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and only Q.P. reading is presented.
- The test data of the worst-case condition(s) was recorded.

7.4.3. DATA SAMPLE

Freq. (MHz)	Matching Factor (dB)	Spectrum Reading (dBuV)	SG Level (dBuV)	Emission (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Note (F/H/O)
x.xx	12.2	14.0	38.4	26.2	46	-19.8	F

Freq. = Emission frequency in MHz
 Matching Factor = Matching network(50/75 Ω) attenuation
 Spectrum Reading= Spectrum analyzer reading
 S.G. Level = Standard S.G. output level
 Emission = SG Level - Matching Factor
 Limit Line = Limit stated in standard
 Over Limit = Reading in reference to limit
 F = Fundamental
 H = Harmonics
 O = Other

Calculation Formula

Over Limit (dB) = Emission (dB μ V) – Limit Line (dB μ V)

7.4.4. TEST RESULTS

Conducted Differential Voltage Emissions

Model No.	N/A	6dB Bandwidth	N/A
Environmental Conditions	N/A	Test Mode	N/A
Tested by	N/A	Standard	N/A

Note: No applicable, the EUT doesn't have tuner port.

RF Modulator Output

Model No.	N/A	6dB Bandwidth	N/A
Environmental Conditions	N/A	Test Mode	N/A
Tested by	N/A	Standard	N/A

Note: No applicable, the EUT doesn't have tuner port.

7.5. HARMONICS CURRENT MEASUREMENT

7.5.1. LIMITS OF HARMONICS CURRENT MEASUREMENT

Limits for Class A equipment		Limits for Class D equipment		
Harmonics Order n	Max. permissible harmonics current A	Harmonics Order n	Max. permissible harmonics current per watt mA/W	Max. permissible harmonics current A
Odd harmonics		Odd Harmonics only		
3	2.30	3	3.4	2.30
5	1.14	5	1.9	1.14
7	0.77	7	1.0	0.77
9	0.40	9	0.5	0.40
11	0.33	11	0.35	0.33
13	0.21	13	0.30	0.21
15≤n≤39	0.15x15/n	15≤n≤39	3.85/n	0.15x15/n
Even harmonics				
2	1.08			
4	0.43			
6	0.30			
8≤n≤40	0.23x8/n			

NOTE: 1. Class A and Class D are classified according to item 7.5.3.
2. According to section 7 of EN 61000-3-2, the above limits for all equipment except for lighting equipment having an active input power > 75 W and no limits apply for equipment with an active input power up to and including 75 W.

7.5.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.5.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-029)

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- The classification of EUT is according to section 5 of EN 61000-3-2.
- The EUT is classified as follows:


Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.

Class B: Portable tools; Arc welding equipment which is not professional equipment.

Class C: Lighting equipment.

Class D: Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors; television receivers and refrigerators and freezers having one or more variable-speed drives to control compressor motor(s).

- The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

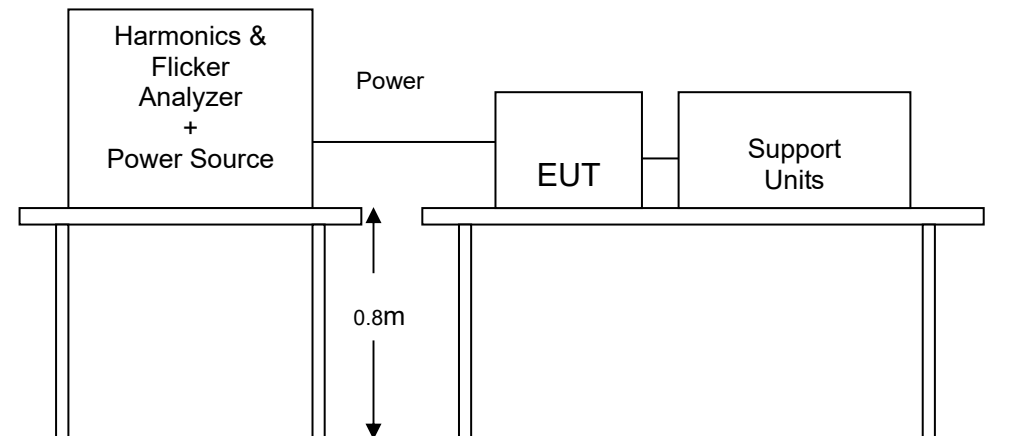7.5.4. TEST SETUP

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.5.5. TEST RESULTS

Power Consumption	N/A	Test Results	N/A
Environmental Conditions	N/A	Limits	Class ☐ A ☐ B ☐ C ☐ D
Test Mode	N/A	Tested by	N/A

NOTE: The subject equipment is not intended to be connected to AC mains supply. Therefore, this test is not applicable.

7.6. VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

7.6.1. LIMITS OF VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

TEST ITEM	LIMIT	REMARK
P_{st}	1.0	P_{st} means short-term flicker indicator.
P_{lt}	0.65	P_{lt} means long-term flicker indicator.
T_{dt} (ms)	500	T_{dt} means maximum time that dt exceeds 3.3 %.
d_{max} (%)	4%	d_{max} means maximum relative voltage change.
dc (%)	3.3%	dc means relative steady-state voltage change

7.6.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.6.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-030)

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

7.6.4. TEST SETUP

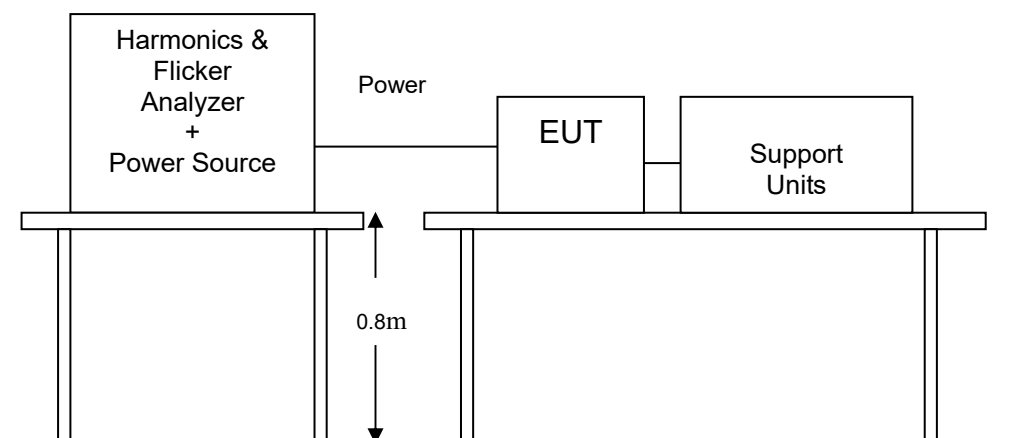

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.6.5. TEST RESULTS

Observation Period (Tp)	N/A	Test Mode	N/A
Environmental Conditions	N/A	Tested by	N/A

TEST PARAMETER	MEASUREMENT VALUE	LIMIT	REMARK
P _{st}	N/A	1.0	N/A
P _{lt}	N/A	0.65	N/A
T _{dt} (ms)	N/A	500	N/A
d _{max} (%)	N/A	4%	N/A
dc (%)	N/A	3.3%	N/A

NOTE: The subject equipment is not intended to be connected to AC mains supply. Therefore, this test is not applicable.

8 IMMUNITY TEST

8.1. GENERAL DESCRIPTION

Product Standard	EN 55035: 2017	
	Test Type	Minimum Requirement
Basic Standard, Specification, and Performance Criterion required	IEC 61000-4-2	Electrostatic Discharge – ESD: 8kV air discharge, 4kV Contact discharge Performance Criterion B
	IEC 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test – RS: 80 ~1000 MHz, 3V/m, 80% AM(1kHz) 1800 MHz (±1%), 2600 MHz (±1%), 3500 MHz (±1%), 5000 MHz (±1%), 3V/m, 80% AM(1kHz) Performance Criterion A
	IEC 61000-4-4	Electrical Fast Transient/Burst - EFT, AC Power Port: 1kV DC Power Port: 0.5kV Analogue/Digital Data Port: 0.5kV Performance Criterion B
	IEC 61000-4-5	Surge Immunity Test: 1.2/50 µs Open Circuit Voltage, 8/20 µs Short Circuit Current, AC Power Port ~ line to line: 1kV, line to ground: 2kV DC Power Port ~ line to ground: 0.5kV Performance Criterion B Analogue/Digital Data (unshielded symmetrical) Port ~ line to ground: 1kV 10/700 µs Open Circuit Voltage Performance Criterion C Analogue/ Digital Data (coaxial or shielded) Port ~ line to ground: 0.5kV 1.2/50 µs Open Circuit Voltage Performance Criterion B
	IEC 61000-4-6	Conducted Radio Frequency Disturbances Test –CS: 0.15 ~ 10 MHz, 3Vrms, 80% AM, 1kHz 10 ~ 30 MHz, 3 to 1Vrms, 80% AM, 1kHz 30 ~ 80 MHz, 1Vrms, 80% AM, 1kHz Performance Criterion A
	IEC 61000-4-8	Power frequency magnetic field immunity test 50 Hz or 60 Hz, 1A/m Performance Criterion A
	IEC 61000-4-11	Voltage Dips: i) 0% residual for 0.5 cycle at 50Hz Performance Criterion B ii) 70% residual for 25/30 cycles at 50/60Hz Performance Criterion C Voltage Interruptions: 0% residual for 250/300 cycles at 50/60Hz Performance Criterion C

Product Standard	EN 61000-6-1: 2007	
	Test Type	Minimum Requirement
Basic Standard, Specification, and Performance Criterion required	IEC 61000-4-2	Electrostatic Discharge – ESD: 8kV air discharge, 4kV Contact discharge, Performance Criterion B
	IEC 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test – RS: 80 ~1000 MHz, 3V/m, 80% AM (1kHz) 1400 ~ 2000 MHz, 3V/m, 80% AM (1kHz) 2000 ~ 2700 MHz, 1V/m, 80% AM (1kHz) Performance Criterion A
	IEC 61000-4-4	Electrical Fast Transient/Burst - EFT, AC Power Port: 1kV DC Power Port: 0.5kV Signal Port: 0.5kV Performance Criterion B
	IEC 61000-4-5	Surge Immunity Test: 1.2/50 μ s Open Circuit Voltage, 8 /20 μ s Short Circuit Current, AC Power Port ~ line to line: 0.5; 1kV, line to earth: 0.5; 1; 2kV DC Power Port ~ line to line and line to earth: 0.5kV Performance Criterion B
	IEC 61000-4-6	Conducted Radio Frequency Disturbances Test – CS: AC Power Port; DC Power Port; Signal Port: 0.15~80MHz, 3Vrms, 80% AM, 1kHz Performance Criterion A
	IEC 61000-4-8	Power frequency magnetic field immunity test 50Hz/60Hz, 3A/m Performance Criterion A
	IEC 61000-4-11	Voltage Dips: i) 0% residual for 0.5 cycle at 50Hz 0% residual for 1 cycle at 50Hz Performance Criterion B ii) 70% residual for 25/30 cycles at 50/60Hz Performance Criterion C Voltage Interruptions: 0% residual for 250/300 cycles at 50/60Hz Performance Criterion C

8.2. GENERAL PERFORMANCE CRITERIA DESCRIPTION

Product Standard	EN 55035: 2017
Criteria A:	The apparatus shell continues to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the manufacturer does not specify the minimum performance level or the permissible performance loss, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criteria B:	After test, the apparatus shell continues to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomenon below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. However, no change of operating state if stored data is allowed to persist after the test. If the manufacturer does not specify the minimum performance level or the permissible performance loss, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criteria C:	Temporary loss of function is allowed, provided the functions is self-recoverable or can be restored by the operation of controls by the user in accordance with the manufacturer instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

Product Standard	EN 61000-6-1: 2007
Criteria A:	The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
Criteria B:	The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.
Criteria C:	Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls.

8.3. ELECTROSTATIC DISCHARGE (ESD)

8.3.1. TEST SPECIFICATION

EN 55035

Basic Standard:	IEC 61000-4-2
Discharge Impedance:	330 ohm / 150 pF
Discharge Voltage:	Air Discharge: 2 ; 4 ; 8 kV (Direct) Contact Discharge: 2 ; 4 kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Minimum 10 times at each test point
Discharge Mode:	Single Discharge 1 second minimum

8.3.2. TEST INSTRUMENT

IMMUNITY SHIELDED ROOM				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Aneroid Barometer	SATO	7610-20	89090	09/15/2020
ESD Simulator	Teseq	NSG 438	1581	01/27/2020
Thermo-Hygro Meter	Wisewind	N/A	SD-S017	09/17/2020

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

8.3.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-022)

The discharges shall be applied in two ways:

a) Contact discharges to the conductive surfaces and coupling planes:

The EUT shall be exposed to at least 20 discharges, 10 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 10 indirect discharges to the center of the front edge of the Horizontal Coupling Plane (HCP). The remaining three test points shall each receive at least 10 direct contact discharges. If no direct contact test points are available, then at least 20 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.


b) Air discharges at slots and apertures and insulating surfaces:

On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.

The basic test procedure was in accordance with IEC 61000-4-2:

- a) The EUT was located 0.1 m minimum from all side of the **HCP** (dimensions 1.6m x 0.8m).
- b) The support units were located another table 30 cm away from the EUT, but direct support unit was/were located at same location as EUT on the HCP and keep at a distance of 10 cm with EUT.
- c) The time interval between two successive single discharges was at least 1 second.
- d) Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- e) Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- f) At least ten single discharges (in the most sensitive polarity) were applied at the front edge of each **HCP** opposite the center point of each unit of the EUT and 0.1 meters from the front of the EUT. The long axis of the discharge electrode was in the plane of the **HCP** and perpendicular to its front edge during the discharge.
- g) At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane (VCP)** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

8.3.4. TEST SETUP

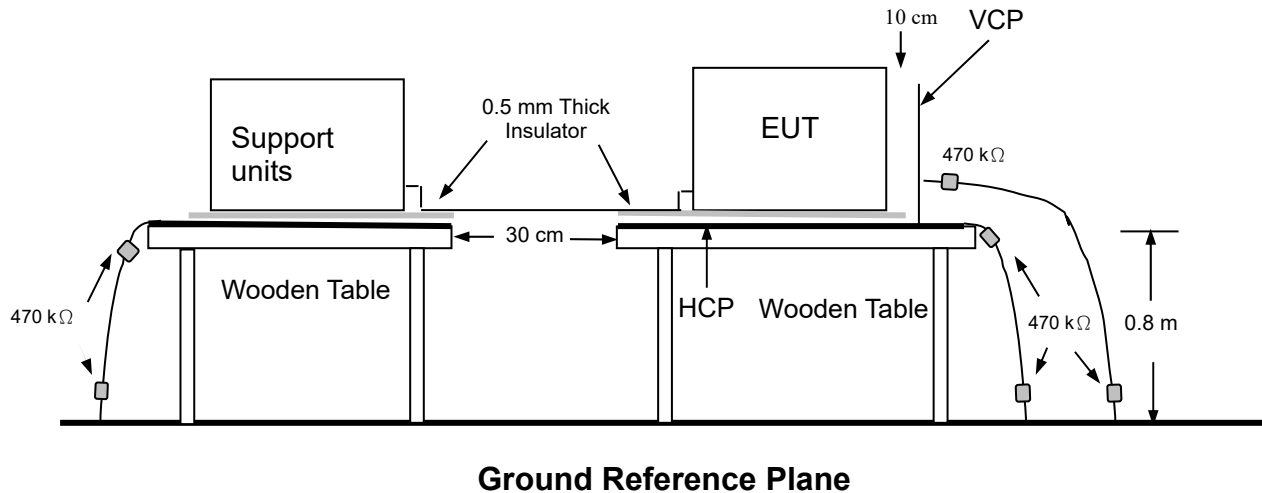

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940k Ohm total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

8.3.5. TEST RESULTS

Temperature	21°C	Humidity	48% RH
Pressure	1004mbar	Tested By	Lion Lee
Required Passing Performance		Criterion B	

Air Discharge									
Test Points	Test Levels			Results					
	± 2 kV	± 4 kV	± 8 kV	Pass	Fail	Performance Criterion		Observation	
Front	☒	☒	☒	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2
Back	☒	☒	☒	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2

Contact Discharge									
Test Points	Test Levels			Results					
	± 2 kV	± 4 kV	± 8 kV	Pass	Fail	Performance Criterion		Observation	
Front	☒	☒	☐	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2
Back	☒	☒	☐	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2
Left	☒	☒	☐	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2
Right	☒	☒	☐	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2
Top	☒	☒	☐	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2

Discharge To Horizontal Coupling Plane									
Side of EUT	Test Levels			Results					
	± 2 kV	± 4 kV	± 8 kV	Pass	Fail	Performance Criterion		Observation	
Front	☒	☒	☐	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2
Back	☒	☒	☐	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2
Left	☒	☒	☐	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2
Right	☒	☒	☐	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2

Discharge To Vertical Coupling Plane									
Side of EUT	Test Levels			Results					
	± 2 kV	± 4 kV	± 8 kV	Pass	Fail	Performance Criterion		Observation	
Front	☒	☒	☐	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2
Back	☒	☒	☐	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2
Left	☒	☒	☐	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2
Right	☒	☒	☐	☒	☐	☒ A	☐ B	Note ☒ 1	☐ 2

NOTE: 1. There was no change compared with initial operation during the test.

8.3.6. TEST SPECIFICATION

EN 61000-6-1

Basic Standard: IEC 61000-4-2

Discharge Impedance: 330 ohm / 150 pF

Discharge Voltage: Air Discharge: 2 ; 4 ; 8 kV (Direct)
Contact Discharge: 2 ; 4 kV (Direct/Indirect)

Polarity: Positive & Negative

Number of Discharge: Minimum 10 times at each test point

Discharge Mode: Single Discharge
1 second minimum

8.3.7. TEST INSTRUMENT

IMMUNITY SHIELDED ROOM				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Aneroid Barometer	SATO	7610-20	89090	09/15/2020
ESD Simulator	Teseq	NSG 438	1581	01/27/2020
Thermo-Hygro Meter	Wisewind	N/A	SD-S017	09/17/2020

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

8.3.8. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-022)

The discharges shall be applied in two ways:

a) Contact discharges to the conductive surfaces and coupling planes:

The EUT shall be exposed to at least 20 discharges, 10 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 10 indirect discharges to the center of the front edge of the Horizontal Coupling Plane (HCP). The remaining three test points shall each receive at least 10 direct contact discharges. If no direct contact test points are available, then at least 20 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.


b) Air discharges at slots and apertures and insulating surfaces:

On those parts of the EUT where it is not possible to perform contact discharge testing, the equipment should be investigated to identify user accessible points where breakdown may occur. Such points are tested using the air discharge method. This investigation should be restricted to those area normally handled by the user. A minimum of 10 single air discharges shall be applied to the selected test point for each such area.

The basic test procedure was in accordance with IEC 61000-4-2:

- a) The EUT was located 0.1 m minimum from all side of the **HCP** (dimensions 1.6m x 0.8m).
- b) The support units were located another table 30 cm away from the EUT, but direct support unit was/were located at same location as EUT on the HCP and keep at a distance of 10 cm with EUT.
- c) The time interval between two successive single discharges was at least 1 second.
- d) Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- e) Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- f) At least ten single discharges (in the most sensitive polarity) were applied at the front edge of each **HCP** opposite the center point of each unit of the EUT and 0.1 meters from the front of the EUT. The long axis of the discharge electrode was in the plane of the **HCP** and perpendicular to its front edge during the discharge.
- g) At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane (VCP)** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

8.3.9. TEST SETUP

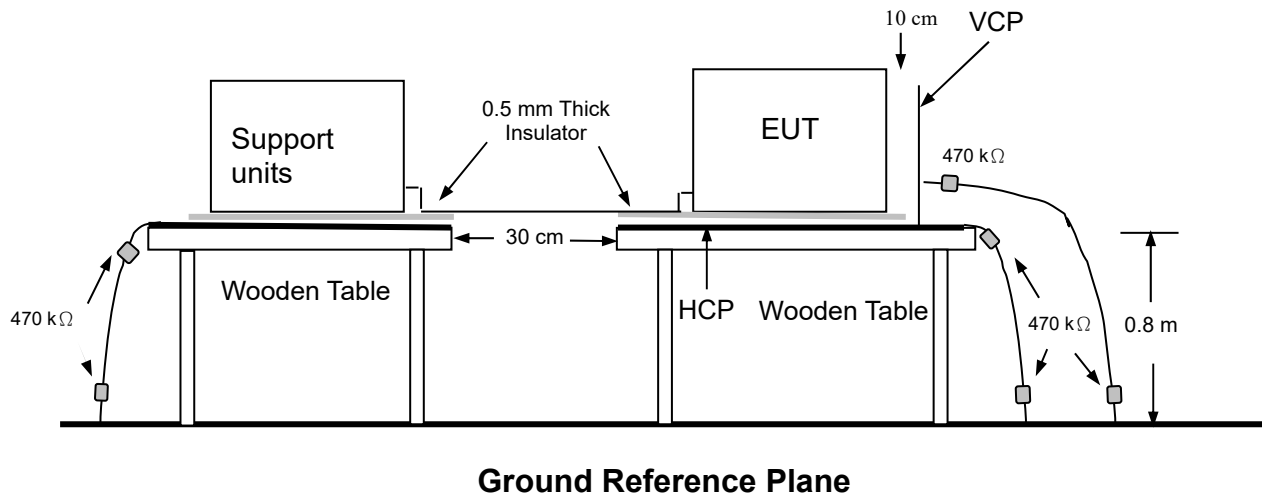

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940k Ohm total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

8.3.10. TEST RESULTS

Temperature	21°C	Humidity	48% RH
Pressure	1004mbar	Tested By	Lion Lee
Required Passing Performance		Criterion B	

Air Discharge								
Test Points	Test Levels			Results				
	± 2 kV	± 4 kV	± 8 kV	Pass	Fail	Performance Criterion	Observation	
Front	☒	☒	☒	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2
Back	☒	☒	☒	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2

Contact Discharge								
Test Points	Test Levels			Results				
	± 2 kV	± 4 kV	± 8 kV	Pass	Fail	Performance Criterion	Observation	
Front	☒	☒	☐	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2
Back	☒	☒	☐	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2
Left	☒	☒	☐	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2
Right	☒	☒	☐	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2
Top	☒	☒	☐	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2

Discharge To Horizontal Coupling Plane								
Side of EUT	Test Levels			Results				
	± 2 kV	± 4 kV	± 8 kV	Pass	Fail	Performance Criterion	Observation	
Front	☒	☒	☐	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2
Back	☒	☒	☐	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2
Left	☒	☒	☐	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2
Right	☒	☒	☐	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2

Discharge To Vertical Coupling Plane								
Side of EUT	Test Levels			Results				
	± 2 kV	± 4 kV	± 8 kV	Pass	Fail	Performance Criterion	Observation	
Front	☒	☒	☐	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2
Back	☒	☒	☐	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2
Left	☒	☒	☐	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2
Right	☒	☒	☐	☒	☐	☒ A ☐ B	Note ☒ 1	☐ 2

NOTE: 1. There was no change compared with initial operation during the test.

8.4. RADIATED, RADIO-FREQUENCY, ELECTROMAGNETIC FIELD (RS)**8.4.1. TEST SPECIFICATION****EN 55035****Basic Standard:** IEC 61000-4-3**Frequency Range:** 80 MHz ~1000 MHz
1800 MHz ($\pm 1\%$), 2600 MHz ($\pm 1\%$), 3500 MHz ($\pm 1\%$), 5000 MHz ($\pm 1\%$)**Field Strength:** 3 V/m**Modulation:** 1kHz Sine Wave, 80%, AM Modulation**Frequency Step:** 1 % of preceding frequency value**Polarity of Antenna:** Horizontal and Vertical**Test Distance:** 3 m**Antenna Height:** 1.5m**8.4.2. TEST INSTRUMENT**

844 RS Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Electric Field Probe	AR	FL7006	0338955	05/06/2020
Field of Calibration	CCS	Chamber#RS	80-1000MHz	04/23/2020
Power Sensor	Boonton	51013-4E	35812	01/28/2020
Power Sensor	Boonton	51013-4E	2972	01/28/2020
RF Power Meter	Boonton	4242-01-02	14357	01/28/2020
Thermo-Hygro Meter	Wisewind	N/A	SD-S019	10/28/2019
Broadband Antenna	AR	AT1080	311819	N.C.R
Power Amplifier	Milmega	80RF1000-600	1079361	N.C.R
Signal Generator	Agilent	N5181A	MY47421336	11/18/2019
Field of Calibration	CCS	Chamber#RS	1-3GHz	03/06/2020
Field of Calibration	CCS	Chamber#RS	1.7-6GHz	04/26/2020
Direction Coupler	AR	DC7200	0343647	N.C.R
Horn Antenna	EMCO	3115	5761	N.C.R
Power Amplifier	AR	60S1G3	302728	N.C.R
Power Amplifier	Milmega	AS1860-100	1075832	N.C.R
Software	Emcware Ver. 2.6.0.16			


NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. N.C.R.= No Calibration required.

8.4.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-023)

The test procedure was in accordance with IEC 61000-4-3

- The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- The frequency range is swept from 80MHz to 1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz with the signal 80% amplitude modulated with a 1kHz sine-wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s, where the frequency range is swept incrementally, the step size was 1% of preceding frequency value.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

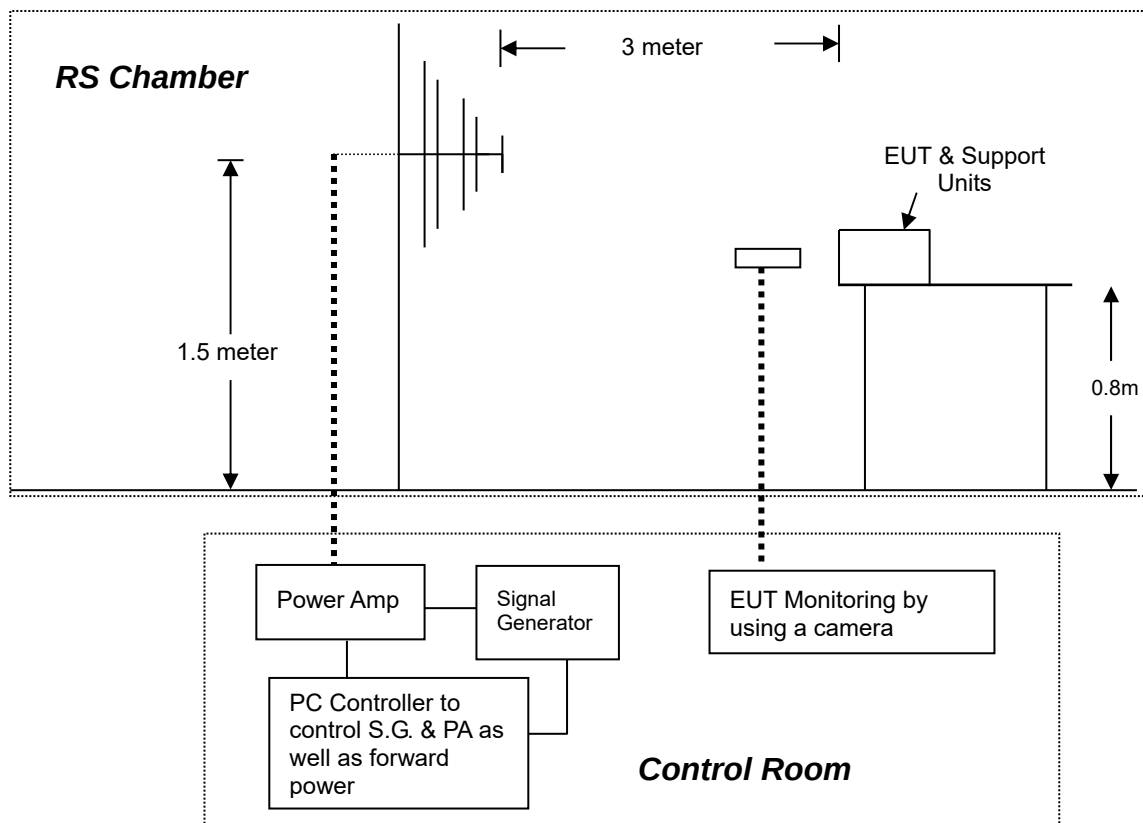8.4.4. TEST SETUP

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:**TABLETOP EQUIPMENT**

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

8.4.5. TEST RESULTS

Temperature	21°C	Humidity	48% RH
Pressure	1004mbar	Dwell Time	3 sec.
Tested By	Lion Lee	Required Passing Performance	Criterion A

Frequency (MHz)	Polarity	Azimuth	Field Strength (V/m)	Performance Criterion	Observation	Result
80 ~ 1000	V&H	0	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
80 ~ 1000	V&H	90	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
80 ~ 1000	V&H	180	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
80 ~ 1000	V&H	270	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
1800MHz, 2600MHz, 3500MHz, 5000MHz ($\pm 1\%$)	V&H	0	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
1800MHz, 2600MHz, 3500MHz, 5000MHz ($\pm 1\%$)	V&H	90	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
1800MHz, 2600MHz, 3500MHz, 5000MHz ($\pm 1\%$)	V&H	180	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
1800MHz, 2600MHz, 3500MHz, 5000MHz ($\pm 1\%$)	V&H	270	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS

NOTE: 1. There was no change compared with the initial operation during the test.

8.4.6. TEST SPECIFICATION**EN 61000-6-1**

Basic Standard:	IEC 61000-4-3
Frequency Range:	80 ~1000 MHz, 1400 ~2000 MHz, 2000 ~2700 MHz
Field Strength:	3 V/m, 3 V/m, 1 V/m
Modulation:	1kHz sine Wave, 80%, AM Modulation.
Frequency Step:	1 % of preceding frequency value
Polarity of Antenna:	Horizontal and Vertical
Test Distance:	3 m
Antenna Height:	1.5m

8.4.7. TEST INSTRUMENT


844 RS Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Electric Field Probe	AR	FL7006	0338955	05/06/2020
Field of Calibration	CCS	Chamber#RS	80-1000MHz	04/23/2020
Power Sensor	Boonton	51013-4E	35812	01/28/2020
Power Sensor	Boonton	51013-4E	2972	01/28/2020
RF Power Meter	Boonton	4242-01-02	14357	01/28/2020
Thermo-Hygro Meter	Wisewind	N/A	SD-S019	10/28/2019
Broadband Antenna	AR	AT1080	311819	N.C.R
Power Amplifier	Milmega	80RF1000-600	1079361	N.C.R
Signal Generator	Agilent	N5181A	MY47421336	11/18/2019
Field of Calibration	CCS	Chamber#RS	1-3GHz	03/06/2020
Direction Coupler	AR	DC7200	0343647	N.C.R
Horn Antenna	EMCO	3115	5761	N.C.R
Power Amplifier	AR	60S1G3	302728	N.C.R
Software	EmcwareVer. 2.6.0.16			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R.= No Calibration required.

8.4.8. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-023)

The test procedure was in accordance with IEC 61000-4-3

- The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- The frequency range is swept from 80 MHz to 2700 MHz, with the signal 80% amplitude modulated with a 1kHz sine-wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s, where the frequency range is swept incrementally, the step size was 1% of preceding frequency value.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

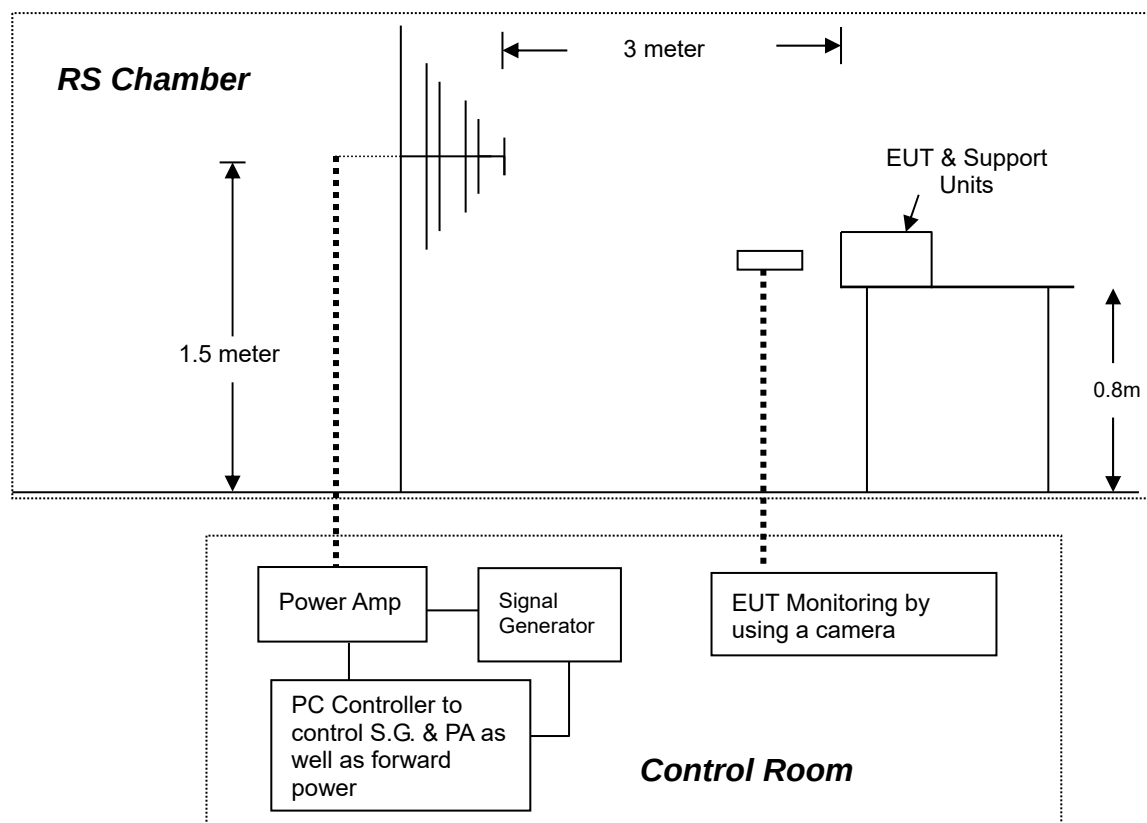8.4.9. TEST SETUP

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:**TABLETOP EQUIPMENT**

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

8.4.10. TEST RESULTS

Temperature	21°C	Humidity	48% RH
Pressure	1004mbar	Dwell Time	3 sec.
Tested By	Lion Lee	Required Passing Performance	Criterion A

Frequency (MHz)	Polarity	Azimuth	Field Strength (V/m)	Performance Criterion	Observation	Result
80-1000	V&H	0	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
80-1000	V&H	90	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
80-1000	V&H	180	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
80-1000	V&H	270	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
1400 ~ 2000	V&H	0	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
1400 ~ 2000	V&H	90	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
1400 ~ 2000	V&H	180	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
1400 ~ 2000	V&H	270	3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
2000 ~ 2700	V&H	0	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
2000 ~ 2700	V&H	90	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
2000 ~ 2700	V&H	180	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
2000 ~ 2700	V&H	270	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS

NOTE: 1. There was no change compared with the initial operation during the test.

8.5. ELECTRICAL FAST TRANSIENT (EFT)

8.5.1. TEST SPECIFICATION

EN 55035

Basic Standard:	IEC 61000-4-4
Test Voltage:	AC Power Port: 1kV
Polarity:	Positive & Negative
Impulse Frequency:	5 kHz
Impulse Wave-shape:	5/50 ns
Burst Duration:	15 ms
Burst Period:	300 ms
Test Duration:	Not less than 1 min.

8.5.2. TEST INSTRUMENT


Immunity Shield Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Capacitive Clamp	EMC-Partner	CN-EFT1000	589	07/01/2020
EMC Test System	Teseq	NSG 3060	1718	11/12/2019
Software	WIN 3000Ver. 1.3.2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R.= No Calibration required.

8.5.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-024)

- All types of cables, including their length, and the interface port of the EUT to which they were connected.
- Both positive and negative polarity discharges were applied.
- The length of the “hot wire” from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 0.5 meter.
- The duration time of each test sequential was 1 minute.
- The transient/burst waveform was in accordance with IEC 61000-4-4, 5/50ns.

8.5.4. TEST SETUP

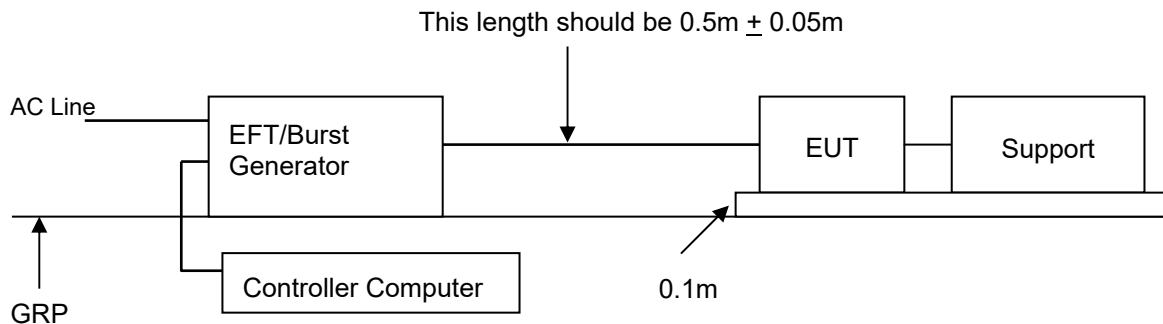

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLETOP EQUIPMENT

The configuration consisted of a wooden table (0.1m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.

8.5.5. TEST RESULTS

Temperature	21°C	Humidity	48% RH
Pressure	1004mbar	Tested By	Lion Lee
Required Passing Performance		Criterion B	

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation	Result
L	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
N	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
L - N	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
PE	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
L – PE	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
N – PE	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
L – N – PE	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS

NOTE: 1. There was no change compared with initial operation during the test.

8.5.6. TEST SPECIFICATION

EN 61000-6-1

Basic Standard:	IEC 61000-4-4
Test Voltage:	AC Power Port: 1kV
Polarity:	Positive & Negative
Impulse Frequency:	5 kHz
Impulse Wave-shape:	5/50 ns
Burst Duration:	15 ms
Burst Period:	300 ms
Test Duration:	Not less than 1 min.

8.5.7. TEST INSTRUMENT


Immunity Shield Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Capacitive Clamp	EMC-Partner	CN-EFT1000	589	07/01/2020
EMC Test System	Teseq	NSG 3060	1718	11/12/2019
Software	WIN 3000Ver. 1.3.2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R.= No Calibration required.

8.5.8. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-024)

- All types of cables, including their length, and the interface port of the EUT to which they were connected.
- Both positive and negative polarity discharges were applied.
- The length of the “hot wire” from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 0.5 meter.
- The duration time of each test sequential was 1 minute.
- The transient/burst waveform was in accordance with IEC 61000-4-4, 5/50ns.

8.5.9. TEST SETUP

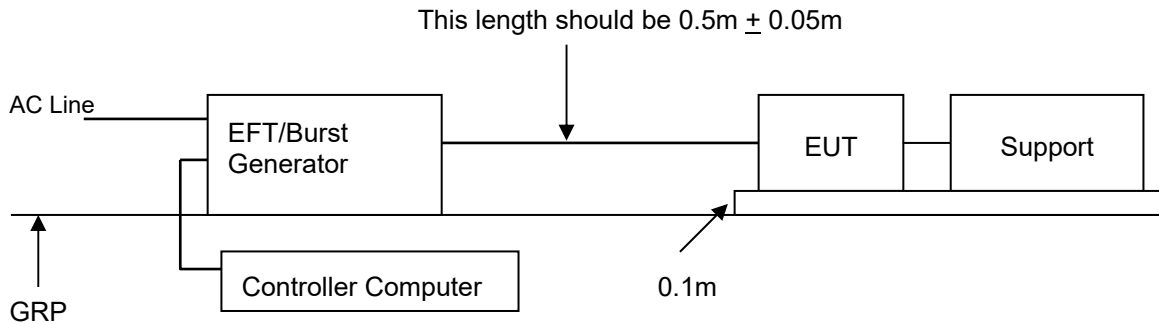

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLETOP EQUIPMENT

The configuration consisted of a wooden table (0.1m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.

8.5.10. TEST RESULTS

Temperature	21°C	Humidity	48% RH
Pressure	1004mbar	Tested By	Lion Lee
Required Passing Performance		Criterion B	

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation	Result
L	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
N	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
L - N	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
PE	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
L – PE	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
N – PE	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
L – N – PE	+/-	1	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS

NOTE: 1. There was no change compared with initial operation during the test.

8.6. SURGE IMMUNITY TEST

8.6.1. TEST SPECIFICATION

EN 55035

Basic Standard: IEC 61000-4-5

Wave-Shape: Combination Wave
1.2/50 μ s Open Circuit Voltage
8/20 μ s Short Circuit Current
10/700 μ s Open Circuit Voltage

Test Voltage: AC Power Port ~ line to line: 0.5; 1kV, line to ground: 0.5; 1; 2kV

Surge Input/Output: AC Power Line: L-N / L-PE / N-PE

Generator Source Impedance: 2 ohm between networks
12 ohm between network and ground

Polarity: Positive/Negative

Phase Angle: 0° / 90° / 180° / 270°

Pulse Repetition Rate: 1 time / min. (maximum)

Number of Tests: 5 positive and 5 negative at selected points

8.6.2. TEST INSTRUMENT

Immunity Shield Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R.= No Calibration required.

8.6.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-025)

a) For EUT power supply:


The surge is applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

b) For test applied to unshielded un-symmetrically operated interconnection lines of EUT:

The surge was applied to the lines via the capacitive coupling. The coupling / decoupling networks didn't influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

c) For test applied to unshielded symmetrically operated interconnection / telecommunication lines of EUT:

The surge was applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor were not specified. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

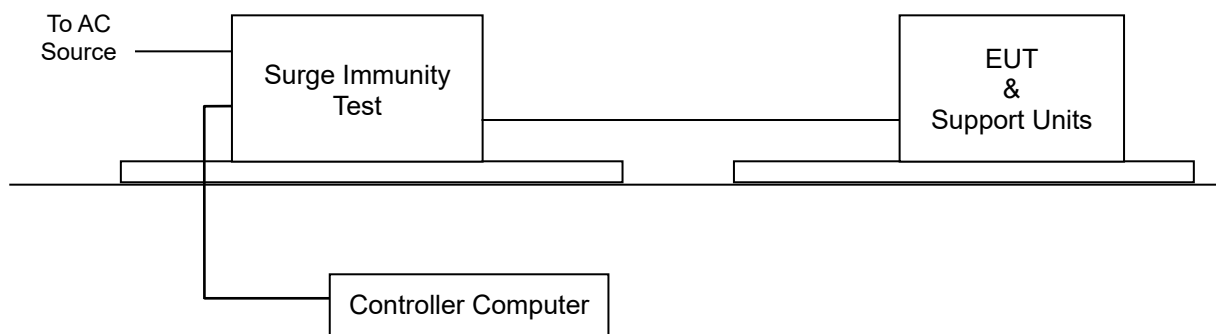8.6.4. TEST SETUP

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.6.5. TEST RESULTS

Temperature	N/A	Humidity	N/A
Pressure	N/A	Tested By	N/A
Required Passing Performance		Criterion B	

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation	Result
L - N	+/-	0.5; 1	☐ A ☐ B	Note ☒ 1 ☐ 2	N/A
L - PE	+/-	0.5; 1; 2	☐ A ☐ B	Note ☒ 1 ☐ 2	N/A
N - PE	+/-	0.5; 1; 2	☐ A ☐ B	Note ☒ 1 ☐ 2	N/A

NOTE: 1. The subject equipment is not intended to be connected to AC mains supply. Therefore, this test is not applicable.

8.6.6. TEST SPECIFICATION

EN 61000-6-1

Basic Standard:	IEC 61000-4-5
Wave-Shape:	Combination Wave 1.2/50 μ s Open Circuit Voltage 8/20 μ s Short Circuit Current
Test Voltage:	AC Power Port ~ line to line: 0.5; 1kV, line to earth: 0.5; 1; 2kV
Surge Input/Output:	AC Power Line: L-N / L-PE / N-PE
Generator Source Impedance:	2 ohm between networks 12 ohm between network and ground
Polarity:	Positive/Negative
Phase Angle:	0° / 90° / 180° / 270°
Pulse Repetition Rate:	1 time / min. (maximum)
Number of Tests:	5 positive and 5 negative at selected points

8.6.7. TEST INSTRUMENT

Immunity Shield Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R.= No Calibration required.

8.6.8. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-025)

a) For EUT power supply:


The surge is applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

b) For test applied to unshielded un-symmetrically operated interconnection lines of EUT:

The surge was applied to the lines via the capacitive coupling. The coupling / decoupling networks didn't influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

c) For test applied to unshielded symmetrically operated interconnection / telecommunication lines of EUT:

The surge was applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor were not specified. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

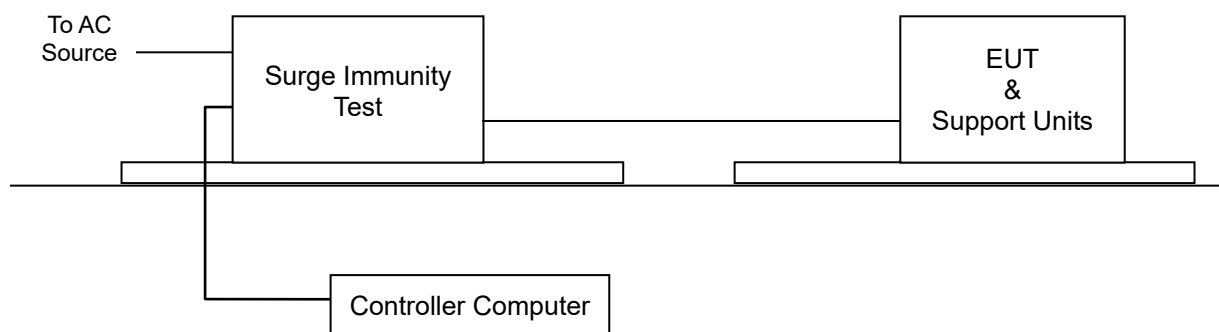8.6.9. TEST SETUP

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.6.10. TEST RESULTS

Temperature	N/A	Humidity	N/A
Pressure	N/A	Tested By	N/A
Required Passing Performance		Criterion B	

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation	Result
L - N	+/-	0.5; 1	☐ A ☐ B	Note ☒ 1 ☐ 2	N/A
L - PE	+/-	0.5; 1; 2	☐ A ☐ B	Note ☒ 1 ☐ 2	N/A
N - PE	+/-	0.5; 1; 2	☐ A ☐ B	Note ☒ 1 ☐ 2	N/A

NOTE: 1. The subject equipment is not intended to be connected to AC mains supply. Therefore, this test is not applicable.

8.7. CONDUCTED RADIO FREQUENCY DISTURBANCES (CS)

8.7.1. TEST SPECIFICATION

EN 55035

Basic Standard:	IEC 61000-4-6
Frequency Range:	0.15 ~ 10 MHz 10 ~ 30 MHz 30 ~ 80 MHz
Field Strength:	0.15 ~ 10 MHz, 3V r.m.s 10 ~ 30 MHz, 3 to 1 V r.m.s 30 ~ 80 MHz, 1V r.m.s
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Coupled cable:	Power Mains, Unshielded
Coupling device:	CDN-M3 (3 wires)

8.7.2. TEST INSTRUMENT

CS Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
CDN	SCHAFFNER	CDN M225	16500	12/03/2019
CDN	TESEQ	CDN S751A	37469	06/18/2020
CDN	Teseq	CDN M016	35821	01/14/2020
CDN	FCC	FCC-801-M3-25A	9973	12/02/2019
Immunity Test System	TESEQ	NSG 4070	39581	12/04/2019
Software	NSG 4070 Control Program V1.2.0			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R.= No Calibration required.

8.7.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-026)

The EUT shall be tested within its intended operating and climatic conditions.


The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.

The frequency range was swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal was modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate was 1.5×10^{-3} decades/s. Where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value from 150 kHz to 80 MHz.

The dwell time at each frequency was less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequency(ies) and harmonics or frequencies of dominant interest, was analyzed separately.

Attempts were made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

8.7.4. TEST SETUP

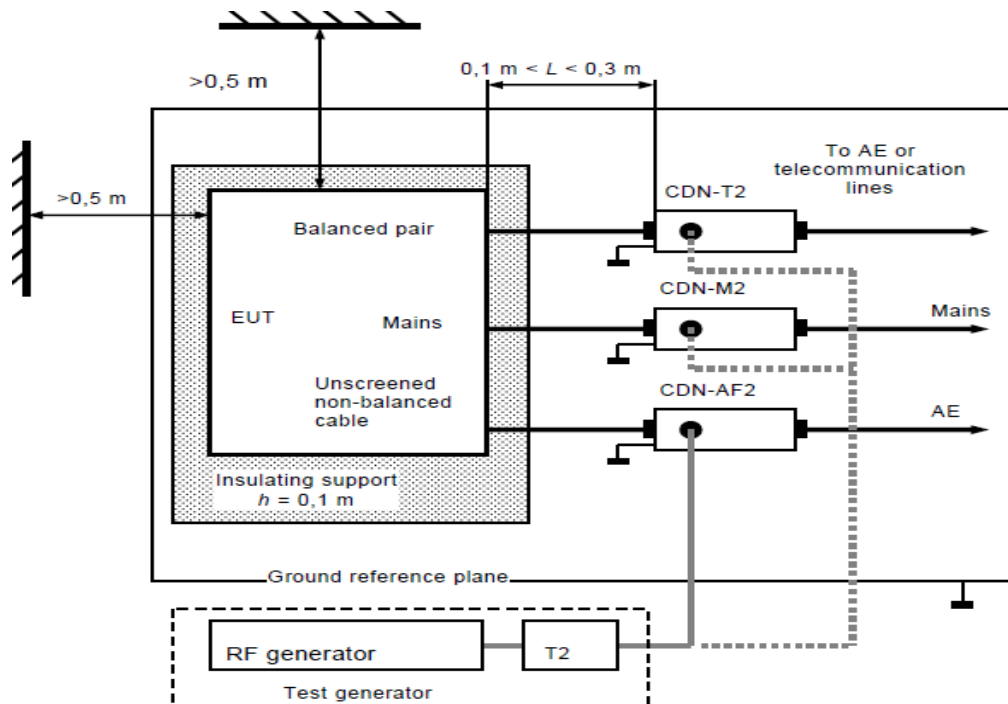

Note: 1. The CDNs and / or EM clamp used for real test depends on ports and cables configuration of EUT.
2. The EUT clearance from any metallic obstacles shall be at least 0.5m

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:**TABLE-TOP AND FLOOR-STANDING EQUIPMENT**

The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

8.7.5. TEST RESULTS

Temperature	21°C	Humidity	48% RH
Pressure	1004mbar	Dwell Time	3 sec.
Tested By	Lion Lee	Required Passing Performance	Criterion A

Frequency Band (MHz)	Field Strength (Vrms)	Cable	Injection Method	Performance Criterion	Observation	Result
0.15 ~ 10	3	AC Power Line (0.3m)	CDN-M3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
10 ~ 30	3~1	AC Power Line (0.3m)	CDN-M3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS
30 ~ 80	1	AC Power Line (0.3m)	CDN-M3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS

NOTE: 1. There was no change compared with initial operation during the test.

8.7.6. TEST SPECIFICATION**EN 61000-6-1**

Basic Standard:	IEC 61000-4-6
Frequency Range:	0.15 MHz ~ 80 MHz
Field Strength:	3 Vrms
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Coupled cable:	AC Power Mains, Unshielded
Coupling device:	CDN-M3 (3 wires)

8.7.7. TEST INSTRUMENT

CS Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
CDN	SCHAFFNER	CDN M225	16500	12/03/2019
CDN	TESEQ	CDN S751A	37469	06/18/2020
CDN	Teseq	CDN M016	35821	01/14/2020
CDN	FCC	FCC-801-M3-25A	9973	12/02/2019
Immunity Test System	TESEQ	NSG 4070	39581	12/04/2019
Software	NSG 4070 Control Program V1.2.0			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R.= No Calibration required.

8.7.8. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-026)

The EUT shall be tested within its intended operating and climatic conditions.


The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.

The frequency range was swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal was modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate was 1.5×10^{-3} decades/s. Where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value from 150 kHz to 80 MHz.

The dwell time at each frequency was less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequency(ies) and harmonics or frequencies of dominant interest, was analyzed separately.

Attempts were made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

8.7.9. TEST SETUP

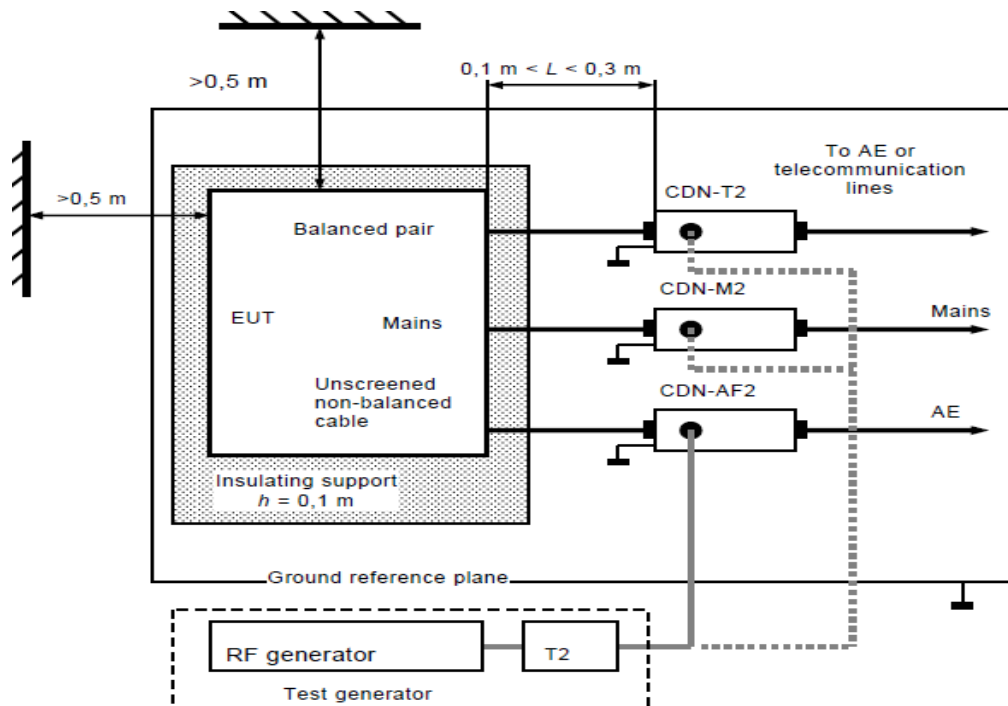

Note: 1. The CDNs and / or EM clamp used for real test depends on ports and cables configuration of EUT.
2. The EUT clearance from any metallic obstacles shall be at least 0.5m

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:TABLE-TOP AND FLOOR-STANDING EQUIPMENT

The equipment to be tested was placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

8.7.10. TEST RESULTS

Temperature	21°C	Humidity	48% RH
Pressure	1004mbar	Dwell Time	3 sec.
Tested By	Lion Lee	Required Passing Performance	Criterion A

Frequency Band (MHz)	Field Strength (Vrms)	Cable	Injection Method	Performance Criterion	Observation	Result
0.15 ~ 80	3	AC Power Line (0.3m)	CDN-M3	☒ A ☐ B	Note ☒ 1 ☐ 2	PASS

NOTE: 1. There was no change compared with initial operation during the test.

8.8. POWER FREQUENCY MAGNETIC FIELD

8.8.1. TEST SPECIFICATION

EN 55035

Basic Standard:	IEC 61000-4-8
Frequency Range:	50Hz
Field Strength:	1 A/m
Observation Time:	1 minute
Inductance Coil:	Rectangular type, 1mx1m

8.8.2. TEST INSTRUMENT


Immunity Shield Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
AC/DC Clamp Meter	Fluke	353	33360025	07/23/2020
Magnetic Field Coil	Teseq	INA 703 W/ 2141	1976 / 1413	03/31/2020
Magnetic Field Meter	Sypris	4080	0247	11/01/2019
5kVA Power Source	Teseq	5001IX-208-TSQ	1207A03643	03/31/2020
Software	Win2120Ver. 5.0			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R.= No Calibration required.

8.8.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-027)

- The equipment was configured and connected to satisfy its functional requirements. It shall be placed on the GRP with the interposition of a 0.1m-thick insulating support.
- The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

8.8.4. TEST SETUP

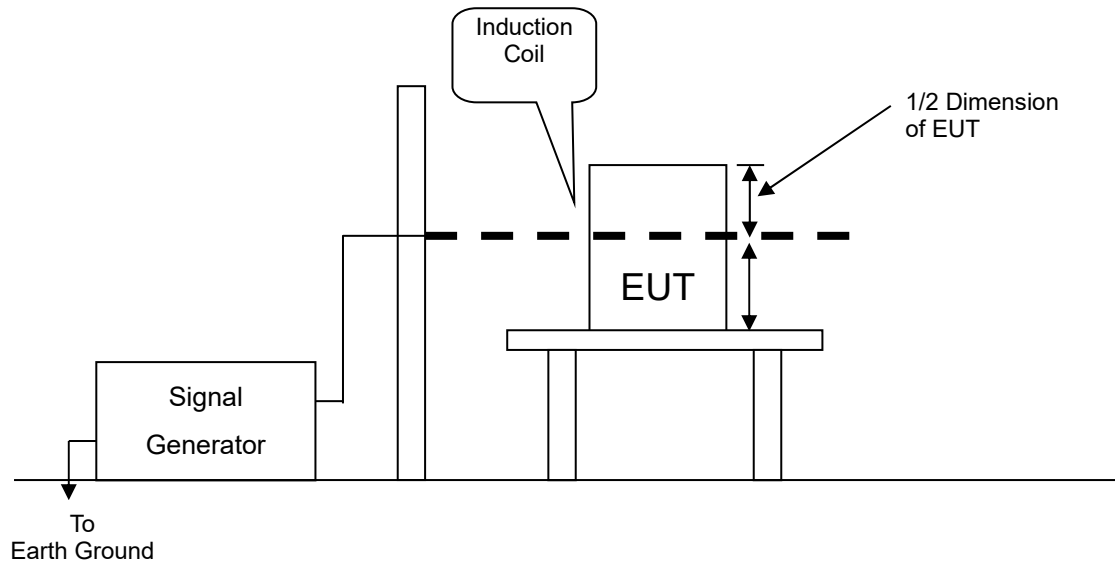

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:**TABLETOP EQUIPMENT**

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

8.8.5. TEST RESULTS

Temperature	21°C	Humidity	48% RH
Pressure	1004mbar	Tested By	Lion Lee
Required Passing Performance		Criterion A	

Direction	Field Strength (A/m)	Performance Criterion	Observation	Results
X	1	A	Note	PASS
Y	1	A	Note	PASS
Z	1	A	Note	PASS

NOTE: There was no change compared with the initial operation during the test.


8.8.6. TEST SPECIFICATION**EN 61000-6-1****Basic Standard:** IEC 61000-4-8**Frequency Range:** 50Hz / 60Hz**Field Strength:** 3A/m**Observation Time:** 1 minute**Inductance Coil:** Rectangular type, 1mx1m**8.8.7. TEST INSTRUMENT**

Immunity Shield Room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
AC/DC Clamp Meter	Fluke	353	33360025	07/23/2020
Magnetic Field Coil	Teseq	INA 703 W/ 2141	1976 / 1413	03/31/2020
Magnetic Field Meter	Sypris	4080	0247	11/01/2019
5kVA Power Source	Teseq	5001IX-208-TSQ	1207A03643	03/31/2020
Software	Win2120Ver. 5.0			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R.= No Calibration required.

8.8.8. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-027)

- The equipment was configured and connected to satisfy its functional requirements. It shall be placed on the GRP with the interposition of a 0.1m-thick insulating support.
- The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- The power supply, input and output circuits shall be connected to the sources of power supply, control and signal.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

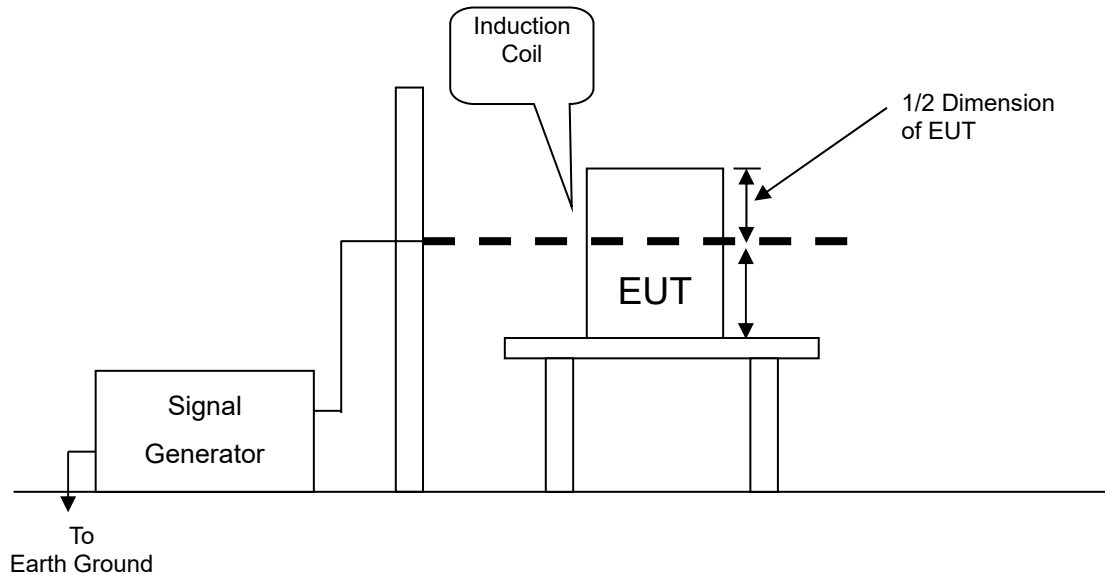8.8.9. TEST SETUP

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:**TABLETOP EQUIPMENT**

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

8.8.10. TEST RESULTS

Temperature	21°C	Humidity	48% RH
Pressure	1004mbar	Tested By	Lion Lee
Required Passing Performance		Criterion A	

Direction	Field Strength (A/m)	Performance Criterion	Observation	Results
X	3	A	Note	PASS
Y	3	A	Note	PASS
Z	3	A	Note	PASS

NOTE: There was no change compared with the initial operation during the test.

8.9. VOLTAGE DIP & VOLTAGE INTERRUPTIONS

8.9.1. TEST SPECIFICATION

EN 55035

Basic Standard: IEC 61000-4-11

Test duration time: Minimum three test events in sequence

Interval between event: Minimum 10 seconds

Phase Angle: 0° / 180°

Test cycle: 3 times


8.9.2. TEST INSTRUMENT

Immunity shielded room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R.= No Calibration required.

8.9.3. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-028)

1. The EUT and support units were located on a wooden table, 0.8 m away from ground floor.
2. Setting the parameter of tests and then perform the test software of test simulator.
3. Conditions changes to occur at 0 degree crossover point of the voltage waveform.
4. Recording the test result in test record form.

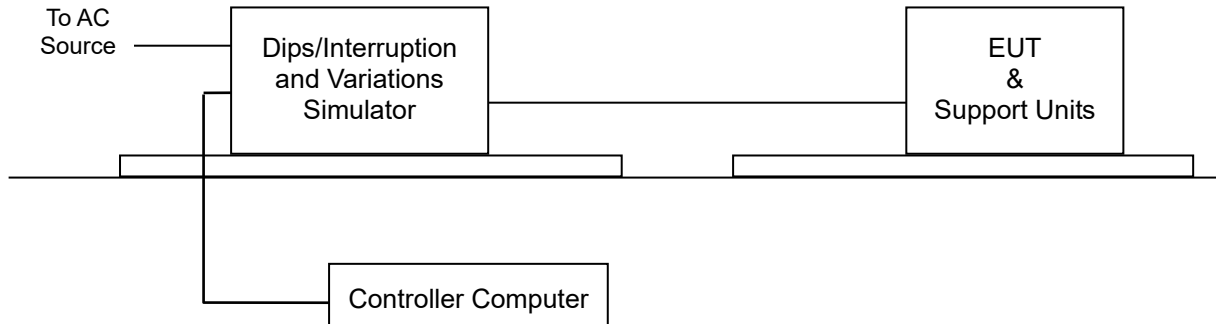8.9.4. TEST SETUP

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.9.5. TEST RESULTS

Temperature	N/A	Humidity	N/A
Pressure	N/A	Tested By	N/A
Required Passing Performance	Criterion B: i) 0% residual 0.5 cycle at 50Hz Criterion C: ii) 70% residual 25/30 cycles at 50/60Hz 0% residual for 250/300 cycles at 50/60Hz		

Test Power: 230Vac, 50Hz				
Voltage (% Residual)	Duration (Cycle)	Performance Criterion	Observation	Test Result
0	0.5	☐ A ☐ B ☐ C	Note ☒ 1 ☐ 2	N/A
70	25	☐ A ☐ B ☐ C	Note ☒ 1 ☐ 2	N/A
0	250	☐ A ☐ B ☐ C	Note ☒ 1 ☐ 2	N/A

Test Power: 230Vac, 60Hz				
Voltage (% Residual)	Duration (Cycle)	Performance Criterion	Observation	Test Result
70	30	☐ A ☐ B ☐ C	Note ☒ 1 ☐ 2	N/A
0	300	☐ A ☐ B ☐ C	Note ☒ 1 ☐ 2	N/A

NOTE: 1. The subject equipment is not intended to be connected to AC mains supply. Therefore, this test is not applicable

8.9.6. TEST SPECIFICATION

EN 61000-6-1

Basic Standard: IEC 61000-4-11

Test duration time: Minimum three test events in sequence

Interval between event: Minimum 10 seconds

Angle: 0° / 180°

Test cycle: 3 times

8.9.7. TEST INSTRUMENT


Immunity shielded room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R.= No Calibration required.

8.9.8. TEST PROCEDURE (please refer to measurement standard or CCS SOP PA-028)

1. The EUT and support units were located on a wooden table, 0.8 m away from ground floor.
2. Setting the parameter of tests and then perform the test software of test simulator.
3. Conditions changes to occur at 0 degree crossover point of the voltage waveform.
4. Recording the test result in test record form.

8.9.9. TEST SETUP

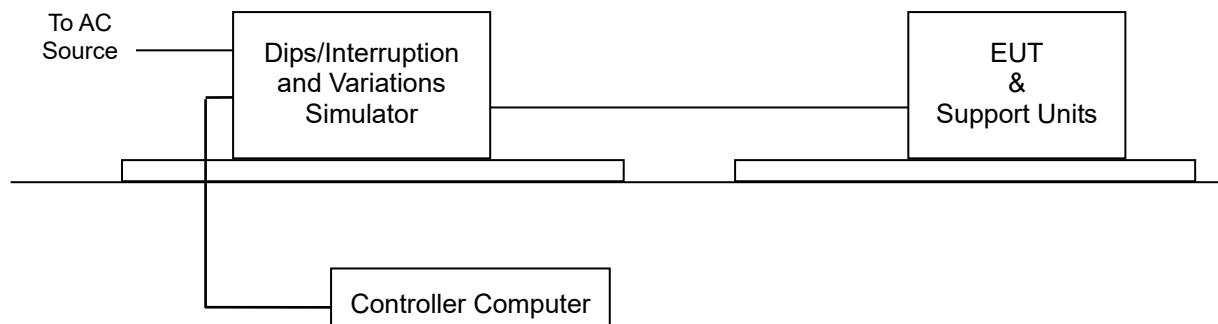

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.9.10. TEST RESULTS


Temperature	N/A	Humidity	N/A
Pressure	N/A	Tested By	N/A
Required Passing Performance	Criterion B: i) 0% residual 0.5 cycle at 50Hz 0% residual 1 cycle at 50Hz Criterion C: ii) 70% residual 25/30 cycles at 50/60Hz iii) 0% residual for 250/300 cycles at 50/60Hz		

Test Power: 230Vac, 50Hz				
Voltage (% Residual)	Duration (Cycle)	Performance Criterion	Observation	Test Result
0	0.5	☐ A ☐ B ☐ C	Note ☒ 1 ☐ 2	N/A
0	1	☐ A ☐ B ☐ C	Note ☒ 1 ☐ 2	N/A
70	25	☐ A ☐ B ☐ C	Note ☒ 1 ☐ 2	N/A
0	250	☐ A ☐ B ☐ C	Note ☒ 1 ☐ 2	N/A

Test Power: 230Vac, 60Hz				
Voltage (% Residual)	Duration (Cycle)	Performance Criterion	Observation	Test Result
70	30	☐ A ☐ B ☐ C	Note ☒ 1 ☐ 2	N/A
0	300	☐ A ☐ B ☐ C	Note ☒ 1 ☐ 2	N/A

NOTE: 1. The subject equipment is not intended to be connected to AC mains supply. Therefore, this test is not applicable.

9 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST

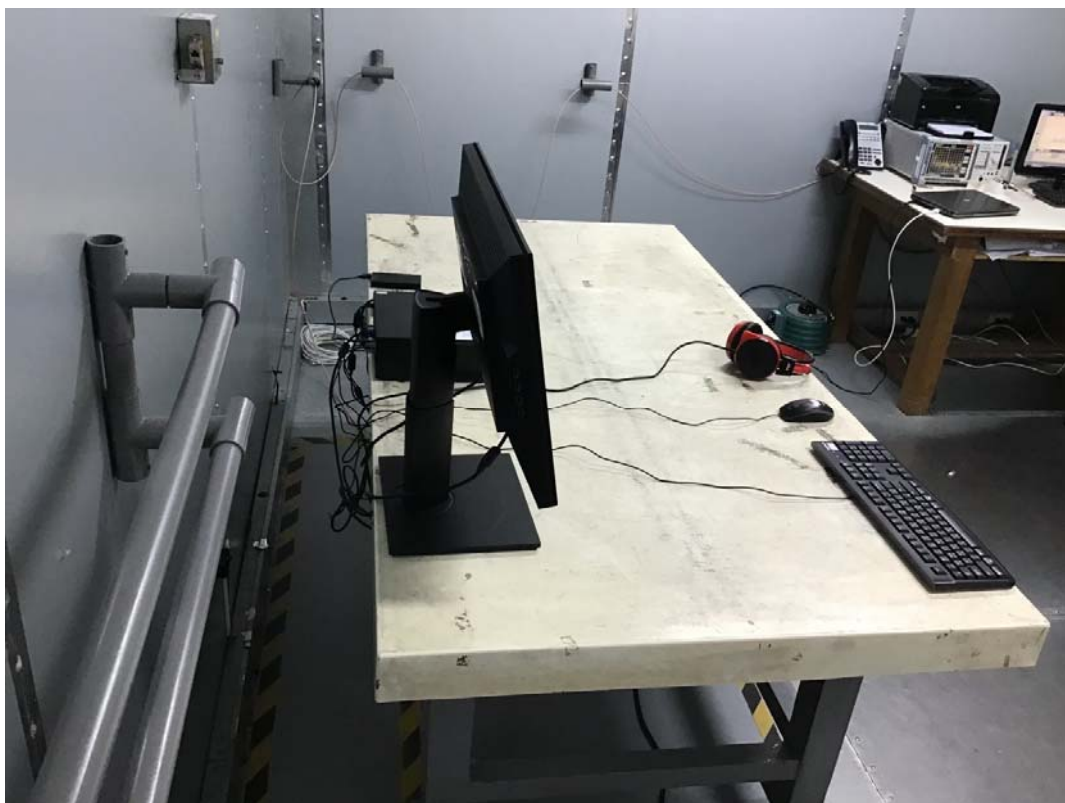


RADIATED EMISSION TEST



ESD Test



RS Test

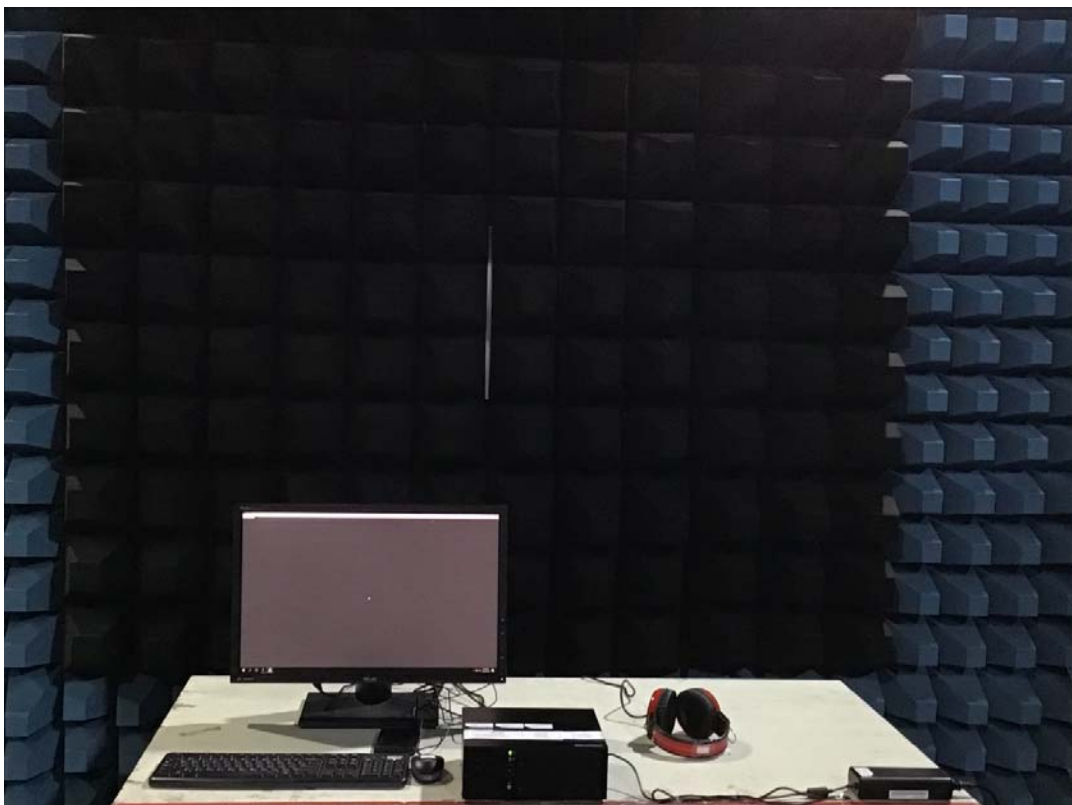

EFT Test



CS Test



PFMF Test

APPENDIX 1 - PHOTOGRAPHS OF EUT

T191005D06



T191005D06

