

RDIMM DDR5 4800 16GB

Datasheet

(SQR-RD5N16G4K8SZZB)

CONTENTS

1. Description	4
2. Features	4
3. Dimension.....	5
4. Pin Descriptions	6
5. Pin Assignments	7
6. Block Diagram	8
7. Thermal Characteristics	9
8. Operating, Standby, and Refresh Currents.....	10
9. Timing Parameters	11
10. SERIAL PRESENCE DETECT SPECIFICATION	15
Appendix: Part Number Table	20

Revision History

Rev	Date	Modification
1.0	1 st Dec., 2022	Official release

Advantech reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Advantech is believed to be accurate and reliable. However, Advantech does not assure any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

Copyright © 1983-2011 Advantech Co., Ltd. All rights reserved.

1. Description

DDR5 RDIMM							
Part Number	Density	Data Rate	DIMM Organization	Number of DRAM	Number of rank	side	ECC
SQR-RD5N16G4K8SZZB (Samsung 2Gx8(16Gb) B-die)	16GB	4800 MT/s	2Gx80	10	1	2	Y

2. Features

● Key Parameter

Industry Nomenclature	tCK (ns)	tRCD (ns)	tRP (ns)	tRAS (ns)	tRC (ns)
PC5-4800	0.416	16.00	16.00	32	48.00


● tRFC parameter by Density

Parameter	8Gb	16Gb	24Gb	32Gb	Unit
tRFC1,min	195	295	TBD	TBD	ns
tRFC2,min	130	160	TBD	TBD	ns
tRFCsb,min	115	130	TBD	TBD	ns

- JEDEC Standard 288-pin Registered Dual In-Line Memory Module
- Cl-tRCD-tRP: 40-39-39
- VDD=VDDQ= 1.1V (1.067V ~ 1.166V)
- VPP=1.8V (1.746V ~ 1.908V)
- VDDSPD= 1.8V
- On-die, internal, adjustable VREF generation for DQ,CA,CS
- 16n-bit prefetch
- Two independent I/O sub channels
- Programmable /CAS Latency: 22,26,28,30,32,36,40,42
- tREFI 3.9us for 0°C ≤ Tcase < 85°C
- tREFI 1.95us for 85°C < Tcase ≤ 95°C
- Fly-by topology
- I3C/I2C support
- Terminated control and C/A bus
- SPD EEPROM Hub and Integrated Thermal Sensor
- Halogen-free

3. Dimension

- (32GB, 2 Ranks 2Gx8 DDR5 base RDIMM)

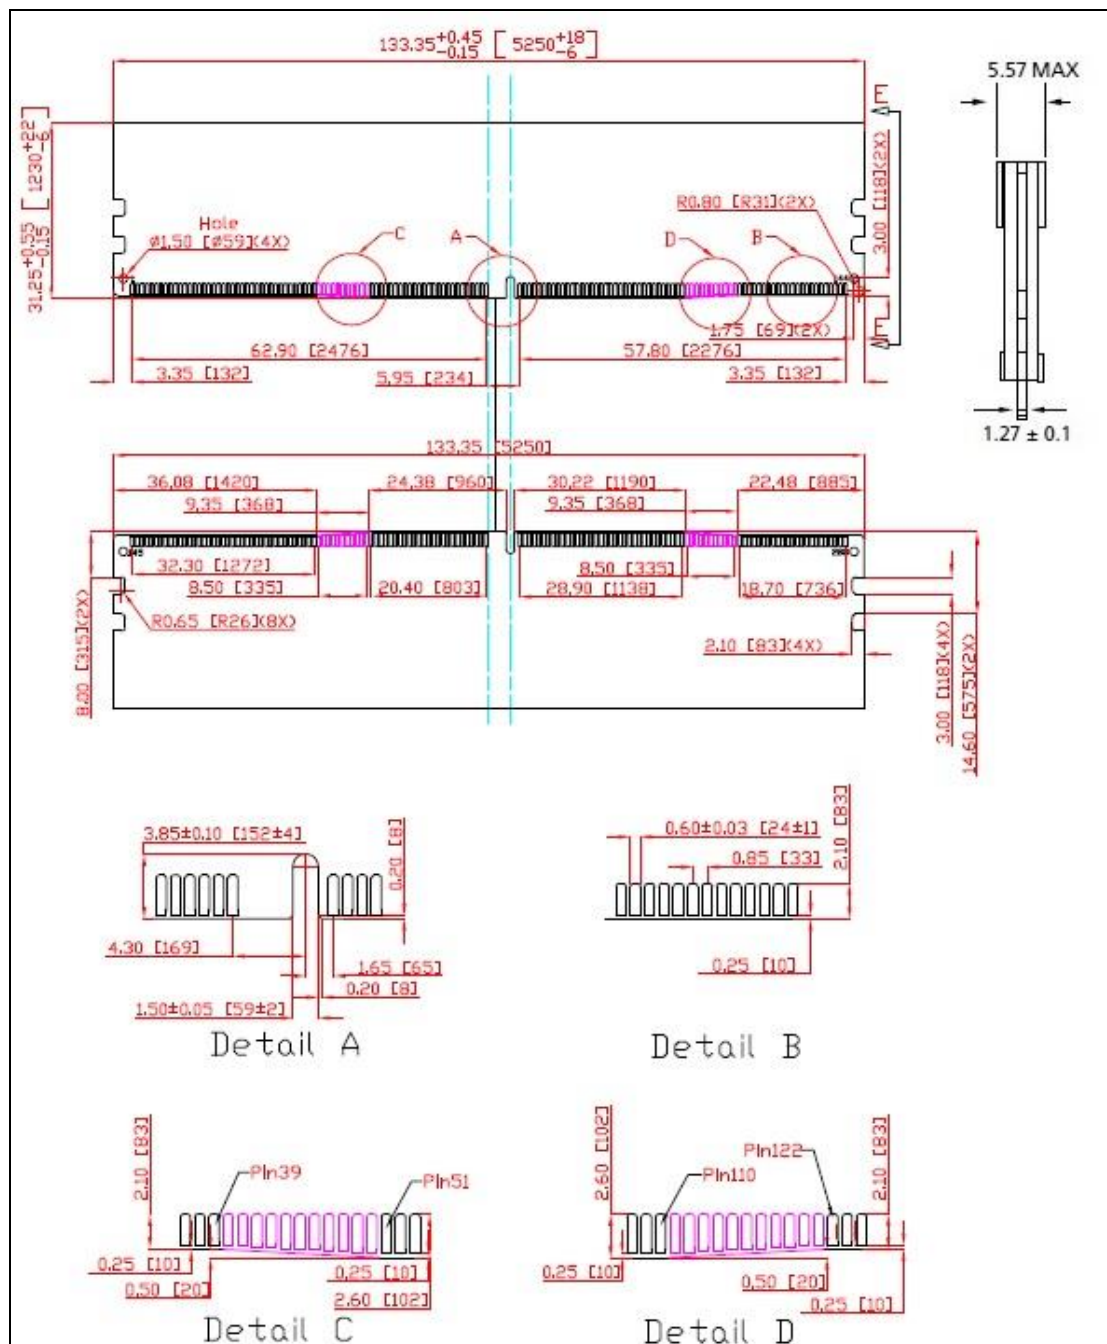

Note: All dimensions are in millimeters (mils) and should be kept within a tolerance of ± 0.15 (6), unless otherwise specified.


4. Pin Descriptions

Symbol	Type	I/O Level	Description	Symbol	Type	I/O Level	Description
CK_t, CK_c	Input	VDDQ	Clock:	DQ[31:0]_A DQ[31:0]_B	Input/ Output	VDDQ	Data Input/Output
CA[12:0]_A CA[12:0]_B	Input	VDDQ	Command/Address Inputs	CB[3:0]_A CB[3:0]_B	Input/ Output	VDDQ	ECC Check Bits Input/Output
CS[1:0]_A CS[1:0]_B	Input	VDDQ	Chip Select	DQS[4:0]_A_t DQS[4:0]_B_t	Input/ Output	VDDQ	Data Strobe
ALERT_n	Output	VDDQ	Alert	DQS[4:0]_A_c DQS[4:0]_B_c	Input/ Output	VDDQ	Data Strobe
RESET_n	CMOS Input	VDDQ	Active Low Asynchronous Reset	DM[3:0]_A_n DM[3:0]_B_n	Input	VDDQ	Input Data Mask
PWR_GOOD	Input/ Output	VDDQ	Power Good Indicator	VIN_BULK	Supply		External Power Supply
HSCL	Input	VOUT	Host Sideband Bus Clock	PWR_EN	Input		PMIC Enable
HSDA	Input/ Output	VOUT	Host Sideband Bus Data	VSS	Supply		Ground
HAS	Input	GND	Host Sideband Bus Device ID	RFU			Reserved for future use

5. Pin Assignments

288-Pin DDR5 RDIMM Front								288-Pin DDR5 RDIMM Back							
Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol	Pin	Symbol
1	VIN_BULK	37	Vss	73	Vss	109	DQ5_B	145	VIN_BULK	181	DQ22_A	217	CK_t	253	Vss
2	RFU	38	DQ21_A	74	PAR_A	110	Vss	146	VIN_BULK	182	Vss	218	CK_c	254	DQ7_B
3	VIN_MGMT	39	Vss	75	Vss	111	DQ8_B	147	PWR_GOOD D/FAL_n	183	DQ23_A	219	Vss	255	Vss
4	SCL	40	DQ24_A	76	CA0_B	112	Vss	148	SAA	184	Vss	220	RFU	256	DQ10_B
5	SDA	41	Vss	77	Vss	113	DQ9_B	149	RFU	185	DQ26_A	221	CA1_B	257	Vss
6	Vss	42	DQ25_A	78	CA2_B	114	Vss	150	RFU	186	Vss	222	Vss	258	DQ11_B
7	DQ0_A	43	Vss	79	Vss	115	DQS1_B_t	151	Vss	187	DQ27_A	223	CA3_B	259	Vss
8	Vss	44	DQS3_A_t	80	CA4_B	116	DQS1_B_c	152	DQ2_A	188	Vss	224	Vss	260	DQS6_B_c, TDQS6_B_c
9	DQ1_A	45	DQS3_A_c	81	Vss	117	Vss	153	Vss	189	DQS8_A_c, TDQS8_A_c	225	CA5_B	261	DQS6_B_t, TDQS6_B_t
10	Vss	46	Vss	82	CA6_B	118	DQ12_B	154	DQ3_A	190	DQS8_A_t, TDQS8_A_t	226	Vss	262	Vss
11	DQS0_A_t	47	DQ28_A	83	Vss	119	Vss	155	Vss	191	Vss	227	PAR_B	263	DQ14_B
12	DQS0_A_c	48	Vss	84	CS0_B_n	120	DQ13_B	156	DQS5_A_c, TDQS5_A_c DQS5_A_t, TDQS5_A_t	192	DQ30_A	228	Vss	264	Vss
13	Vss	49	DQ29_A	85	Vss	121	Vss	157	DQS5_A_t, TDQS5_A_t	193	Vss	229	CS1_B_n	265	DQ15_B
14	DQ4_A	50	Vss	86	LBD,RSP_A_n	122	DQ16_B	158	Vss	194	DQ31_A	230	Vss	266	Vss
15	Vss	51	CB0_A	87	LBS,RSP_B_n	123	Vss	159	DQ6_A	195	Vss	231	RFU	267	DQ18_B
16	DQ5_A	52	Vss	88	Vss	124	DQ17_B	160	Vss	196	CB2_A	232	RFU	268	Vss
17	Vss	53	CB1_A	89	CB4_B	125	Vss	161	DQ7_A	197	Vss	233	Vss	269	DQ19_B
18	DQ8_A	54	Vss	90	Vss	126	DQS2_B_t	162	Vss	198	CB3_A	234	CB6_B	270	Vss
19	Vss	55	DQS4_A_t	91	CB5_B	127	DQS2_B_c	163	DQ10_A	199	Vss	235	Vss	271	DQS7_B_c, TDQS7_B_c
20	DQ9_A	56	DQS4_A_c	92	Vss	128	Vss	164	Vss	200	DQS9_A_c, TDQS9_A_c	236	CB7_B	272	DQS7_B_t, TDQS7_B_t
21	Vss	57	Vss	93	DQS9_B_t, TDQS9_B_t DBW_B_n	129	DQ20_B	165	DQ11_A	201	DQS9_A_t, TDQS9_A_t	237	Vss	273	Vss
22	DQS1_A_t	58	CB4_A	94	DQS9_B_c, TDQS9_B_c	130	Vss	166	Vss	202	Vss	238	DQS4_B_c	274	DQ22_B
23	DQS1_A_c	59	Vss	95	Vss	131	DQ21_B	167	DQS6_A_c, TDQS6_A_c DQS6_A_t, TDQS6_A_t	203	CB6_A	239	DQS4_B_t	275	Vss
24	Vss	60	CB5_A	96	CB0_B	132	Vss	168	DQS6_A_t, TDQS6_A_t	204	Vss	240	Vss	276	DQ23_B
25	DQ12_A	61	Vss	97	Vss	133	DQ24_B	169	Vss	205	CB7_A	241	CB2_B	277	Vss
26	Vss	62	ALERT_n	98	CB1_B	134	Vss	170	DQ14_A	206	Vss	242	Vss	278	DQ26_B
27	DQ13_A	63	Vss	99	Vss	135	DQ25_B	171	Vss	207	RESET_n	243	CB3_B	279	Vss
28	Vss	64	CS0_A_n	100	DQ0_B	136	Vss	172	DQ15_A	208	Vss	244	Vss	280	DQ27_B
29	DQ16_A	65	Vss	101	Vss	137	DQS3_B_t	173	Vss	209	CS1_A_n	245	DQ2_B	281	Vss
30	Vss	66	CA0_A	102	DQ1_B	138	DQS3_B_c	174	DQ18_A	210	Vss	246	Vss	282	DQS8_B_c, TDQS8_B_c
31	DQ17_A	67	Vss	103	Vss	139	Vss	175	Vss	211	CA1_A	247	DQ3_B	283	DQS8_B_t, TDQS8_B_t
32	Vss	68	CA2_A	104	DQS0_B_t	140	DQ28_B	176	DQ19_A	212	Vss	248	Vss	284	Vss
33	DQS2_A_t	69	Vss	105	DQS0_B_c	141	Vss	177	Vss	213	CA3_A	249	DQS5_B_c, TDQS5_B_c	285	DQ30_B
34	DQS2_A_c	70	CA4_A	106	Vss	142	DQ29_B	178	DQS7_A_c, TDQS7_A_c DQS7_A_t, TDQS7_A_t	214	Vss	250	DQS5_B_t, TDQS5_B_t	286	Vss
35	Vss	71	Vss	107	DQ4_B	143	Vss	179	Vss	215	CA5_A	251	Vss	287	DQ31_B
36	DQ20_A	72	CA6_A	108	Vss	144	RFU	180	Vss	216	Vss	252	DQ6_B	288	Vss

6. Block Diagram

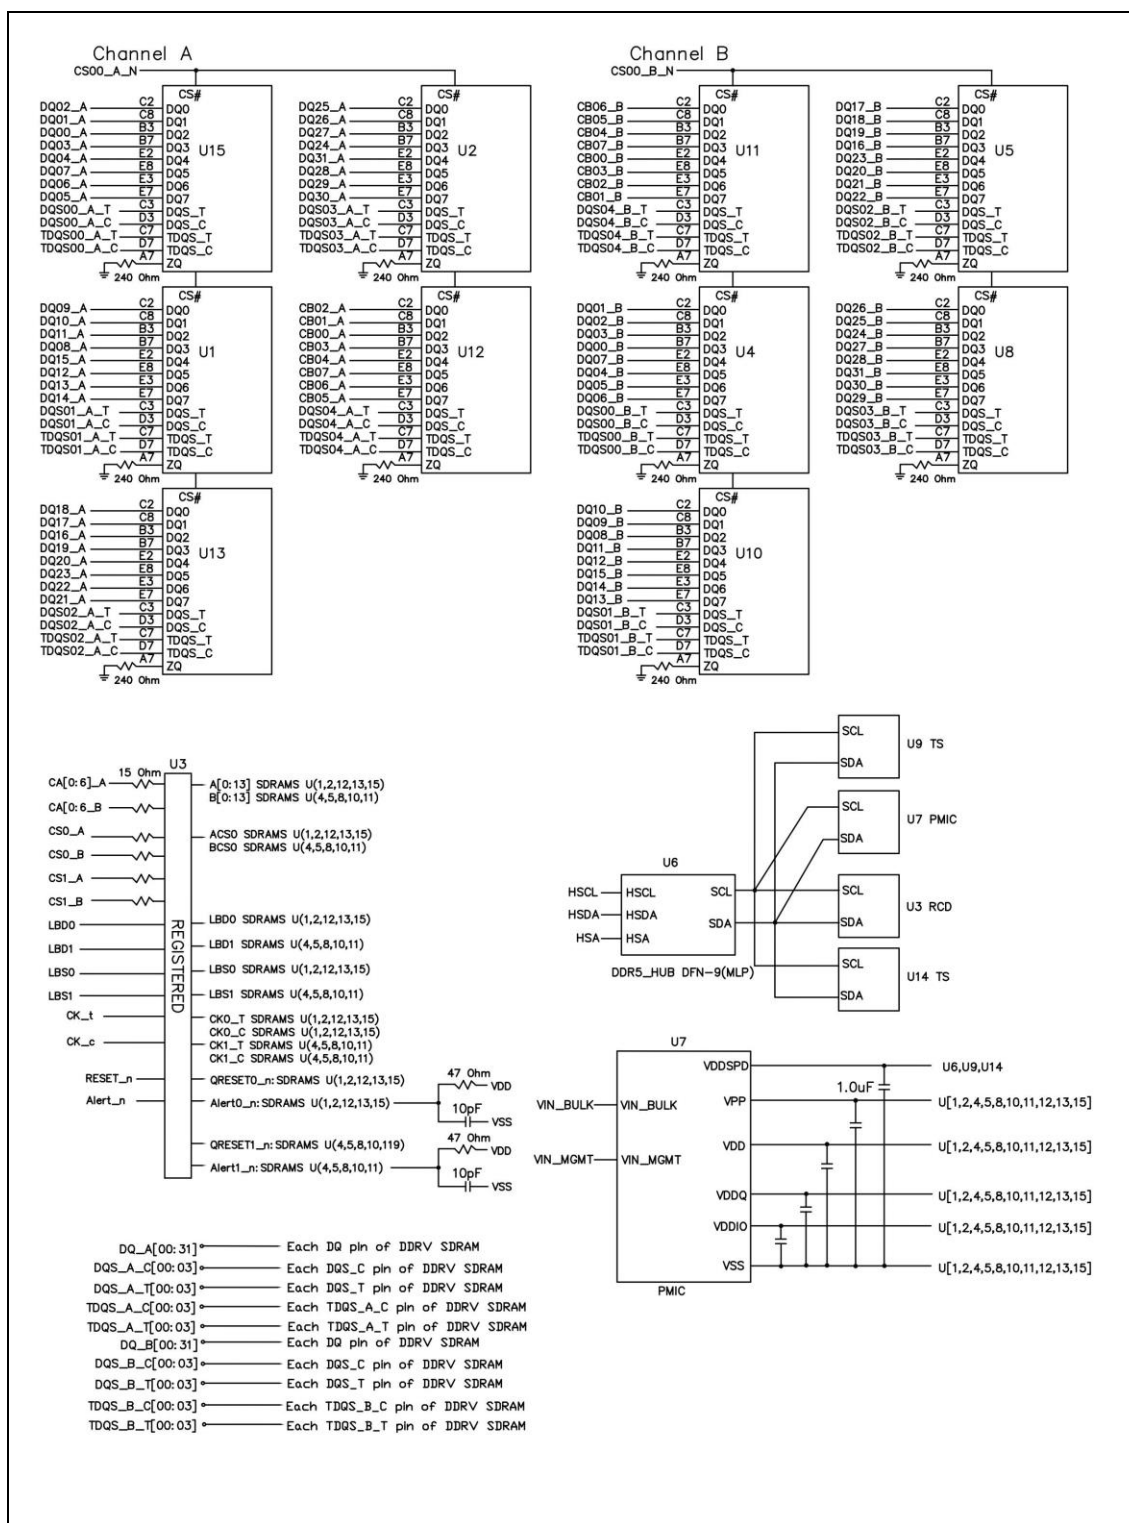

7. Thermal Characteristics

Symbol	Parameter		Rating	Units	Note
T _C	Operation Temperature	Normal Operating Temp.	0 to 85	°C	1,2,3
		Extended Temp.	85 to 95	°C	1,2,3,4
T _{STG}	Storage Temperature		-55 to 100	°C	5
HSTG	Non-operating storage relative humidity (non-condensing)		5 to 95	%	

Note:

1. Maximum operating case temperature; T_C is measured in the center of the package.
2. A thermal solution must be designed to ensure the DRAM device does not exceed the maximum T_C during operation.
3. Device functionality is not guaranteed if the DRAM device exceeds the maximum T_C during operation.
4. If T_C exceeds 85°C, the DRAM must be refreshed externally at 2X refresh, which is a 1.95μs interval refresh rate.
5. Storage temperature is defined as the temperature of the top/center of the DRAM and does not reflect the storage temperatures of shipping trays.

8. Operating, Standby, and Refresh Currents

Symbol	Description	Value		Units
		IDD Max.	IPP Max.	
IDD0	Operating One Bank Active-Precharge Current	530	70	mA
IDD0F	Operating Four Bank Active-Precharge Current	1000	130	mA
IDD2N	Precharge Standby Current	300	40	mA
IDD2P	Precharge Power-Down Current	230	40	mA
IDD3N	Active Standby Current	460	50	mA
IDD3P	Active Power-Down Current	300	50	mA
IDD4R	Operating Burst Read Current	1900	80	mA
IDD4W	Operating Burst Write Current	2300	80	mA
IDD5B	Burst Refresh Current (Normal Refresh Mode)	2300	560	mA
IDD5C	Burst Refresh Current (Same Bank Refresh Mode)	950	250	mA
IDD6N	Self Refresh Current: Normal Temperature Range	620	120	mA
IDD6E	Self Refresh Current: Extended Temperature Range	800	160	mA
IDD7	Operating Bank Interleave Read Current	3200	300	mA
IDD8	Maximum Power Saving Deep Power Down Current	160	40	mA

The above information may be change due to the update of the device specifications and is for reference only.

9. Timing Parameters

Parameter	Symbol	4400		4800		5200		Unit
		Min	Max	Min	Max	Min	Max	
Clock Timing								
Average clock period	tCK,AVG	0.454	<0.500	0.416	<0.454	0.384	<0.416	ns
Command and Address Timing								
Read to Read command delay for same bank group	tCCD_L	8nCK,5ns (MAX)		8nCK,5ns (MAX)		8nCK,5ns (MAX)		nCK
WRITE to WRITE command delay for same bank group	tCCD_L_WR	32nCK, 20ns (MAX)		32nCK, 20ns (MAX)		32nCK, 20ns (MAX)		nCK
WRITE to WRITE command delay for same bank group, second WRITE not RMW	tCCD_L_WR2	16nCK, 10ns (MAX)		16nCK, 10ns (MAX)		16nCK, 10ns (MAX)		nCK
Read to Read or Write to Write command delay for different bank group for BL16, BC8 OTF	tCCD_S	8		8		8		nCK
ACTIVATE to ACTIVATE command delay to different bank group for 2KB page size	tRRD_S,2K	8		8		8		nCK
ACTIVATE to ACTIVATE command delay to different bank group for 1KB page size	tRRD_S,1K	8		8		8		nCK
ACTIVATE to ACTIVATE command delay to same bank group for 2KB page size	tRRD_L,2K	8nCK,5ns (MAX)		8nCK,5ns (MAX)		8nCK,5ns (MAX)		nCK
ACTIVATE to ACTIVATE command delay to same bank group for 1KB page size	tRRD_L,1K	8nCK,5ns (MAX)		8nCK,5ns (MAX)		8nCK,5ns (MAX)		nCK
Four activate window for 2KB page size	tFAW,2K	40nCK, 18.160ns (MAX)		40nCK, 16.640ns (MAX)		40nCK, 15.360ns (MAX)		ns
Four activate window for 1KB page size	tFAW,1K	32nCK, 14.528ns (MAX)		32nCK, 13.312ns (MAX)		32nCK, 12.288ns (MAX)		ns
Delay from start of internal WRITE transaction to internal READ command for different bank group	tWTR_S	4nCK, 2.5ns (MAX)		4nCK, 2.5ns (MAX)		4nCK, 2.5ns (MAX)		ns
Delay from start of internal WRITE transaction to internal READ command for same bank group	tWTR_L	16nCK, 10ns (MAX)		16nCK, 10ns (MAX)		16nCK, 10ns (MAX)		ns
Delay from start of internal WRITE transaction to internal READ with AUTO PRECHARGE command for same bank	tWTRA	tWR-tRTP		tWR-tRTP		tWR-tRTP		ns
Internal READ command to PRECHARGE command delay	tRTP	12nCK, 7.5ns (MAX)		12nCK, 7.5ns (MAX)		12nCK, 7.5ns (MAX)		ns
PRECHARGE to PRECHARGE delay	tPPD	2		2		2		nCK
WRITE recovery time	tWR	29.964		29.952		29.952		ns
DLL locking time	tDLLK	1280		1536		1536		nCK
Mode Register Read/Write Timing								
Mode register READ command period	tMRR	14ns, 16nCK (MAX)		14ns, 16nCK (MAX)		14ns, 16nCK (MAX)		
Mode register READ pattern to mode register READ pattern command spacing	tMRR_p	8		8		8		nCK
Mode register WRITE command period	tMRW	5ns,8nCK (MAX)		5ns,8nCK (MAX)		5ns,8nCK (MAX)		
Mode register SET command delay	tMRD	14ns, 16nCK (MAX)		14ns, 16nCK (MAX)		14ns, 16nCK (MAX)		
DFE mode register WRITE update delay time	tDFE	80		80		80		ns

Data Strobe Timing								
DQS_t, DQS_c differential READ preamble	tRPRE	TBD		TBD		TBD		tCK
DQS_t, DQS_c differential READ postamble	tRPST	TBD		TBD		TBD		tCK
DQS_t, DQS_c rising edge output timing location from rising CK_t, CK_c	tDQSK	-0.286	0.286	-0.3	0.3	TBD	TBD	tCK
DQS_t, DQS_c rising edge output variance window	tDQSKI		0.475		0.49		TBD	tCK
Data Strobe Timing								
2-tCK WRITE preamble enable window	tWPRE_EN_2 tCK	1.5		1.5		1.5		tCK
3-tCK WRITE preamble enable window	tWPRE_EN_3 tCK	2.5		2.5		2.5		tCK
4-tCK WRITE preamble enable window	tWPRE_EN_4 tCK	2.5		2.5		2.5		tCK
DQS_t, DQS_c differential WRITE postamble	tWPST	TBD		TBD		TBD		tCK
Final trained value of host DQS_t-DQS_c timing relative to CWL CK_t-CK_c edge	tDQSoffset	-0.5	0.5	-0.5	0.5	-0.5	0.5	tCK
Write leveling setup time	tWLS	-80	80	-80	80	-80	80	ps
Write leveling hold time	tWLH	-80	80	-80	80	-80	80	ps
Voltage/temperature drift window of first rising DQS_t preamble edge relative to CWL CK_t-CK_c edge (x4/x8/x16)	tDQSD	-0.25 x tWPRE_EN_ntCK	0.25 x tWPRE_EN_ntCK	-0.25 x tWPRE_EN_ntCK	0.25 x tWPRE_EN_ntCK	-0.25 x tWPRE_EN_ntCK	0.25 x tWPRE_EN_ntCK	tCK
Host and system voltage/temperature drift window of first rising DQS_t preamble edge relative to CWL CK_t-CK_c edge (x4/x8/x16)	tDQSS	-0.25 x tWPRE_EN_ntCK						tCK
MPSM Timing								
MPSM exit to first valid command delay	tMPSMX	tMRD		tMRD		tMRD		ns
ZQ Calibration Timing								
ZQ calibration time	tZQCAL	1		1		1		μs
ZQ calibration latch time	tZQLAT	30ns, 8nCK (MIN)		30ns, 8nCK (MIN)		30ns, 8nCK (MIN)		
Reset Timing								
RESET_n low time for reset initialization with stable power	tPW_RESET	1		1		1		μs
Time after RESET_n assertion to ODT off	tRST_ADC		50		50		50	ns
Self Refresh Timing								
Command pass disable delay	tCPDED	5ns,8nCK (MAX)		5ns,8nCK (MAX)		5ns,8nCK (MAX)		
Self refresh CS_n low pulse width	tCSL	10		10		10		ns
Self refresh exit CS_n high pulse width	tCSH_Srexit	13	30	13	30	13	30	ns
Self refresh exit CS_n low pulse width	tCSL_Srexit	3nCK	30ns	3nCK	30ns	3nCK	30ns	
Self refresh exit CS_n low pulse width with frequency change	tCSL_FreqChg	VREFCA_time		VREFCA_time		VREFCA_time		ns
Valid clock requirement before SRX	tCKSRX	3.5ns, 8nCK (MAX)		3.5ns, 8nCK (MAX)		3.5ns, 8nCK (MAX)		ns
Valid clock requirement after SRE	tCKLCS	tCPDED + 1nCK		tCPDED + 1nCK		tCPDED + 1nCK		nCK
Self refresh exit CS_n HIGH	tCASRX	0		0		0		ns
Exit self refresh to commands not requiring a locked DLL	tXS	tRFC1		tRFC1		tRFC1		ns
Exit self refresh to commands requiring a locked DLL	tXS_DLL	tDLLK		tDLLK		tDLLK		ns
Power-Down Timing								
Command pass disable delay	tCPDED	5ns,8nCK (MAX)		5ns,8nCK (MAX)		5ns,8nCK (MAX)		ns
Power-down time	tPD	7.5ns, 8nCK (MAX)	5*tREFI1 (normal) 9*tREFI2 (FGR)	7.5ns, 8nCK (MAX)	5*tREFI1 (normal) 9*tREFI2 (FGR)	7.5ns, 8nCK (MAX)	5*tREFI1 (normal) 9*tREFI2 (FGR)	ns

Exit power-down to next valid command	tXP	7.5ns, 8nCK (MAX)		7.5ns, 8nCK (MAX)		7.5ns, 8nCK (MAX)		ns
Timing of ACT command to POWER DOWN ENTRY command	tACTPDEN	2		2		2		nCK
Timing of PREAb, PREsb or PREpb command to POWER DOWN ENTRY command	tPRPDEN	2		2		2		nCK
Timing of READ or READ w/ AP command to POWER DOWN ENTRY command	tRDPDEN	CL +RBL/2+1		CL +RBL/2+1		CL +RBL/2+1		nCK
Timing of WRITE command to POWER DOWN ENTRY command	tWRPDEN	CWL +WBL/ 2+ (tWR/ tCK(avg)) +1		CWL +WBL/ 2+ (tWR/ tCK(avg)) +1		CWL +WBL/ 2+ (tWR/ tCK(avg)) +1		nCK
Timing of WRITE w/ AP command to POWER DOWN ENTRY command	tWRAPDEN	CWL +WBL/ 2+ -0.25 x tWPRE_EN_n tCKWR+1		CWL +WBL/ 2+ -0.25 x tWPRE_EN_n tCKWR+1		CWL +WBL/ 2+ -0.25 x tWPRE_EN_n tCKWR+1		nCK
Timing of REFAb or REFSb command to POWER DOWN ENTRY command	tREFPDEN	2		2		2		nCK
Timing of MRR command to POWER DOWN ENTRY command	tMRRPDEN	CL+8+1		CL+8+1		CL+8+1		nCK
Timing of MRW command to POWER DOWN ENTRY command	tMRWPDEN	tMRD (MIN)		tMRD (MIN)		tMRD (MIN)		nCK
Timing of MPC command to POWER DOWN ENTRY command	tMPCPDEN	tMPC_delay		tMPC_delay		tMPC_delay		nCK
MPC Command Timing								
MPC to any other valid command	tMPC_Delay	tMRD		tMRD		tMRD		nCK
Time between stable MPC command and first falling CS edge (setup)	tMC_MPC_Setup	3		3		3		nCK
Time between first rising CS edge and stable MPC command (HOLD)	tMC_MPC_Hold	3		3		3		nCK
Time CS_n is held LOW to register MPC command	tMPC_CS	3.5	8	3.5	8	3.5	8	nCK
PDA Timing								
PDA ENUMERATE ID command to any other command cycle	tPDA_DELAY	tPDA_DQ S_DELAY (MAX) + BL/2 + 19ns		tPDA_DQ S_DELAY (MAX) + BL/2 + 19ns		TBD		ns
Delay to rising strobe edge used for sampling DQ during PDA operation	tPDA_DQS_DELAY	5	18	5	18	TBD	TBD	ns
DQS setup time during PDA operation	tPDA_S	3		3		TBD		nCK
DQS hold time during PDA operation	tPDA_H	3		3		TBD		nCK
Read Training Timing								
Registration of MRW continuous burst mode exit to next valid command delay	tCont_Exit_Delay		tCont_Exit + tMRW		tCont_Exit + tMRW		tCont_Exit + tMRW	ns
Registration of MRW continuous burst mode exit to end of training mode	tCont_Exit		CL+BL/ 2+10nCK		CL+BL/ 2+10nCK		CL+BL/ 2+10nCK	ns
Read Preamble Timing								
Delay from MRW command to DQS driven	tSDOn		12nCK, 20ns (MAX)		12nCK, 20ns (MAX)		12nCK, 20ns (MAX)	
Delay from MRW command to DQS disabled	tSDOff		12nCK, 20ns (MAX)		12nCK, 20ns (MAX)		12nCK, 20ns (MAX)	
CA Training Mode Timing								
Registration of CATM entry command to start of training samples time	tCATM_Entry	20		20		20		ns
Registration of CATM exit CS_n assertion to end of training mode (when DQ is no longer driven by the device).	tCATM_Exit		14		14		14	ns

Registration of CATM exit to next valid command delay	tCATM_Exit_Delay	20		20		20		ns
Time from sample evaluation to output on DQ bus	tCATM_Valid		20		20		20	ns
Time output is available on DQ bus	tCATM_DQ_Window	2		2		2		nCK
CS_n assertion duration to exit CATM	tCATM_CS_Exit	2	8	2	8	2	8	nCK
Registration of CSTM entry command to start of training samples time	tCSTM_Entry	20		20		20		ns
Min time between last CS_n pulse and first pulse of MPC command to exit CSTM	tCSTM_Min_to_MPC_exit	4		4		4		nCK
Registration of CSTM exit command to end of training mode	tCSTM_Exit		20		20		20	ns
Time from sample evaluation to output on DQ bus	tCSTM_Valid		20		20		20	ns
Time output is available on DQ bus	tCSTM_DQ_Window	2		2		2		nCK
Registration of CSTM exit to next valid command delay	tCSTM_Exit_Delay	20		20		20		ns
Write Leveling Timing								
Write leveling pulse enable: time from write leveling training enable MRW to when internal write leveling pulse logic level is valid	tWLPEN	0	15	0	15	0	15	ns
Write leveling output delay	tWLO	0	9.5	0	9.5	0	9.5	ns
Write leveling output error	tWLOE	0	2	0	2	0	2	ns
Width of write leveling internal pulse	tWL_Pulse_Width	2		2		2		tCK
VREFCA/VREFCS Timing								
VREFCA/VREFCS command to any other valid command delay	tVREFCA_Delay/ tVREFCS_Delay	tMRD		tMRD		tMRD		nCK
Time CS_n is held LOW to register VREFCA/VREFCS command	tVREFCA_CS/ tVREFCS_CS	3.5	8	3.5	8	3.5	8	nCK
hPPR/sPPR Timing								
hPPR programming time (x4/x8)	tPGMa	1000		1000		1000		ms
hPPR programming time (x16)	tPGMb	2000		2000		2000		ms
sPPR programming time	tPGM_sPPR	CWL +8tCK +tWR		CWL +8tCK +tWR		CWL +8tCK +tWR		tCK
hPPR/sPPR recognition time	tPGM_Exit	tRP		tRP		tRP		ns
hPPR program exit and new address setting time	tPGMPST	50		50		50		μs
sPPR program exit and new address setting time	tPGMPST_sPPR	tMRD		tMRD		tMRD		ns
DQS Interval Oscillator Readout Timing								
Delay time from DQS interval oscillator stop to mode register readout	tOSCO	tMPC_De lay		tMPC_De lay		tMPC_De lay		nCK
DQS interval oscillator start gap in automatic stop mode	tOSCS	tMPC_Delay + DQS interval timer runtime						nCK
ECS Timing								
ECS operation time	tECSc	176nCK, 110ns (MAX)		176nCK, 110ns (MAX)		176nCK, 110ns (MAX)		
CRC Error Reporting Timing								
CRC error to ALERT_n latency	tCRC_ALERT	3	13	3	13	3	13	ns
CRC ALERT_n pulse width	CRC_ALERT_PW	12	20	12	20	12	20	nCK

SERIAL PRESENCE DETECT SPECIFICATION

Byte Number	Function Described	Function supported	Hex Value
0	Number of Bytes in SPD Device	1024 Bytes	30
1	SPD Revision for Base Configuration Parameters	Revision 1.0	10
2	Key Byte / Host Bus Command Protocol Type	DDR5 SDRAM	12
3	Key Byte / Module Type	RDIMM	01
4	First SDRAM Density and Package	Monolithic 16Gb	04
5	First SDRAM Addressing	10 columns/16 rows	00
6	First SDRAM I/O Width	x8	20
7	First SDRAM Bank Groups & Banks Per Bank Group	8BGs / 4Banks per BG	62
8	Second SDRAM Density and Package	N/A	00
9	Second SDRAM Addressing	N/A	00
10	Second SDRAM I/O Width	N/A	00
11	Second SDRAM Bank Groups & Banks Per Bank Group	N/A	00
12	SDRAM BL32 & Post Package Repair	BL32 supported / sPPR	B0
13	SDRAM Duty Cycle Adjuster & Partial Array Self Refresh	PASR not supported	02
14	SDRAM Fault Handling	Supported	01
15	Reserved	Reserved	00
16	SDRAM Nominal Voltage, VDD	1.1V	00
17	SDRAM Nominal Voltage, VDDQ	1.1V	00
18	SDRAM Nominal Voltage, VPP	1.8V	00
19	SDRAM Timing	Standard	00
20	SDRAM Minimum Cycle Time ($t_{CKAVGmin}$), Least Significant Byte	416ps	A0
21	SDRAM Minimum Cycle Time ($t_{CKAVGmin}$), Most Significant Byte	416ps	01
22	SDRAM Maximum Cycle Time ($t_{CKAVGmax}$), Least Significant Byte	1010ps	F2
23	SDRAM Maximum Cycle Time ($t_{CKAVGmax}$), Most Significant Byte	1010ps	03
24	CAS Latencies Supported, First Byte	22,26,28,30,32,36,40,42	7A
25	CAS Latencies Supported, Second Byte	22,26,28,30,32,36,40,42	0D
26	CAS Latencies Supported, Third Byte	22,26,28,30,32,36,40,42	00
27	CAS Latencies Supported, Fourth Byte	22,26,28,30,32,36,40,42	00
28	CAS Latencies Supported, Fifth Byte	22,26,28,30,32,36,40,42	00
29	Reserved	Reserved	00
30	SDRAM Minimum CAS Latency Time (t_{AAmin}), Least Significant Byte	16000ps	80
31	SDRAM Minimum CAS Latency Time (t_{AAmin}), Most Significant Byte	16000ps	3E
32	SDRAM Minimum RAS to CAS Delay Time (t_{RCDmin}), Least Significant Byte	16000ps	80
33	SDRAM Minimum RAS to CAS Delay Time (t_{RCDmin}), Most Significant Byte	16000ps	3E
34	SDRAM Minimum Row Precharge Delay Time (t_{RPmin}), Least Significant Byte	16000ps	80
35	SDRAM Minimum Row Precharge Delay Time (t_{RPmin}), Most Significant Byte	16000ps	3E
36	SDRAM Minimum Active to Precharge Delay Time (t_{RASmin}), Least Significant Byte	32000ps	00
37	SDRAM Minimum Active to Precharge Delay Time (t_{RASmin}), Most Significant Byte	32000ps	7D

38	SDRAM Minimum Active to Active/Refresh Delay Time (t_{RCmin}), Least Significant Byte	480000s	80
39	SDRAM Minimum Active to Active/Refresh Delay Time (t_{RCmin}), Most Significant Byte	480000s	BB
40	SDRAM Minimum Write Recovery Time (t_{WRmin}), Least Significant Byte	30000ps	30
41	SDRAM Minimum Write Recovery Time (t_{WRmin}), Most Significant Byte	30000ps	75
42	SDRAM Minimum Refresh Recovery Delay Time ($t_{RFC1min}$, $t_{RFC1slr min}$), Least Significant Byte	295ns	27
43	SDRAM Minimum Refresh Recovery Delay Time ($t_{RFC1min}$, $t_{RFC1slr min}$), Most Significant Byte	295ns	01
44	SDRAM Minimum Refresh Recovery Delay Time ($t_{RFC2min}$, $t_{RFC2slr min}$), Least Significant Byte	160ns	A0
45	SDRAM Minimum Refresh Recovery Delay Time ($t_{RFC2min}$, $t_{RFC2slr min}$), Most Significant Byte	160ns	00
46	SDRAM Minimum Refresh Recovery Delay Time ($t_{RFCsbmin}$, $t_{RFCsb_slr min}$), Least Significant Byte	130ns	82
47	SDRAM Minimum Refresh Recovery Delay Time ($t_{RFCsb_dlr min}$), Most Significant Byte	130ns	00
48	SDRAM Minimum Refresh Recovery Delay Time, 3DS Different Logical Rank ($t_{RFC1_dlr min}$), Least Significant Byte	N/A	00
49	SDRAM Minimum Refresh Recovery Delay Time, 3DS Different Logical Rank ($t_{RFC1_dlr min}$), Most Significant Byte	N/A	00
50	SDRAM Minimum Refresh Recovery Delay Time, 3DS Different Logical Rank ($t_{RFC2_dlr min}$), Least Significant Byte	N/A	00
51	SDRAM Minimum Refresh Recovery Delay Time, 3DS Different Logical Rank ($t_{RFC2_dlr min}$), Most Significant Byte	N/A	00
52	SDRAM Minimum Refresh Recovery Delay Time, 3DS Different Logical Rank ($t_{RFCsb_dlr min}$), Least Significant Byte	N/A	00
53	SDRAM Minimum Refresh Recovery Delay Time, 3DS Different Logical Rank ($t_{RFCsb_dlr min}$), Most Significant Byte	N/A	00
54	SDRAM Refresh Management, First Byte, First SDRAM	N/A	00
55	SDRAM Refresh Management, Second Byte, First SDRAM	N/A	00
56	SDRAM Refresh Management, First Byte, Second SDRAM	N/A	00
57	SDRAM Refresh Management, Second Byte, Second SDRAM	N/A	00
58	SDRAM Adaptive Refresh Management Level A, First Byte, First SDRAM	N/A	00
59	SDRAM Adaptive Refresh Management Level A, Second Byte, First SDRAM	N/A	00
60	SDRAM Adaptive Refresh Management Level A, First Byte, Second SDRAM	N/A	00
61	SDRAM Adaptive Refresh Management Level A, Second Byte, Second SDRAM	N/A	00
62	SDRAM Adaptive Refresh Management Level B, First Byte, First SDRAM	N/A	00
63	SDRAM Adaptive Refresh Management Level B, Second Byte, First SDRAM	N/A	00
64	SDRAM Adaptive Refresh Management Level B, First Byte, Second SDRAM	N/A	00
65	SDRAM Adaptive Refresh Management Level B, Second Byte, Second SDRAM	N/A	00
66	SDRAM Adaptive Refresh Management Level C, First Byte, First SDRAM	N/A	00
67	SDRAM Adaptive Refresh Management Level C, Second Byte, First SDRAM	N/A	00
68	SDRAM Adaptive Refresh Management Level C, First Byte, Second SDRAM	N/A	00
69	SDRAM Adaptive Refresh Management Level C, Second Byte, Second SDRAM	N/A	00
70	SDRAM Minimum Active to Active Command Delay Time, Same Bank Group (t_{RRD_Lmin}), Least Significant Byte	5000ps	88
71	SDRAM Minimum Active to Active Command Delay Time, Same Bank Group (t_{RRD_Lmin}), Most Significant Byte	5000ps	13
72	SDRAM Minimum Active to Active Command Delay Time, Same Bank Group (t_{RRD_Lmin}), Lower Clock Limit	8nCK	08
73	SDRAM Minimum CAS _n to CAS _n Command Delay Time, Same Bank Group (t_{CCD_Lmin}), Least Significant Byte	5000ps	88

74	SDRAM Minimum CAS _n to CAS _n Command Delay Time, Same Bank Group (t _{CCD_Lmin}), Most Significant Byte	5000ps	13
75	SDRAM Minimum CAS _n to CAS _n Command Delay Time, Same Bank Group (t _{CCD_Lmin}), Lower Clock Limit	8nCK	08
76	SDRAM Minimum Write CAS _n to Write CAS _n Command Delay Time, Same Bank Group (t _{CCD_L_WRmin}), Least Significant Byte	20000ps	20
77	SDRAM Minimum Write CAS _n to Write CAS _n Command Delay Time, Same Bank Group (t _{CCD_L_WRmin}), Most Significant Byte	20000ps	4E
78	SDRAM Minimum Write CAS _n to Write CAS _n Command Delay Time, Same Bank Group (t _{CCD_L_WRmin}), Lower Clock Limit	32nCK	20
79	SDRAM Minimum Write CAS _n to Write CAS _n Command Delay Time, Second Write not RMW, Same Bank Group (t _{CCD_L_WR2min}), Least Significant Byte	10000ps	10
80	SDRAM Minimum Write CAS _n to Write CAS _n Command Delay Time, Second Write not RMW, Same Bank Group (t _{CCD_L_WR2min}), Most Significant Byte	10000ps	27
81	SDRAM Minimum Write CAS _n to Write CAS _n Command Delay Time, Second Write not RMW, Same Bank Group (t _{CCD_L_WR2min}), Lower Clock Limit	16nCK	10
82	SDRAM Minimum Four Activate Window (t _{FAWmin}), Least Significant Byte	13333ps	15
83	SDRAM Minimum Four Activate Window (t _{FAWmin}), Most Significant Byte	13333ps	34
84	SDRAM Minimum Four Activate Window (t _{FAWmin}), Lower Clock Limit	32nCK	20
85	SDRAM Minimum Internal Write to Read Command Delay Time, Same Bank Group, (t _{WTR_Lmin}), Least Significant Byte	10000ps	10
86	SDRAM Minimum Internal Write to Read Command Delay Time, Same Bank Group, (t _{WTR_Lmin}), Most Significant Byte	10000ps	27
87	SDRAM Minimum Internal Write to Read Command Delay Time, Same Bank Group, (t _{WTR_Lmin}), Lower Clock Limit	16nCK	10
88	SDRAM Minimum Internal Write to Read Command Delay Time, Different Bank Group, (t _{WTR_smin}), Least Significant Byte	2500ps	C4
89	SDRAM Minimum Internal Write to Read Command Delay Time, Different Bank Group, (t _{WTR_smin}), Most Significant Byte	2500ps	09
90	SDRAM Minimum Internal Write to Read Command Delay Time, Different Bank Group, (t _{WTR_smin}), Lower Clock Limit	4nCK	04
91	SDRAM Minimum Internal Read to Precharge Command Delay Time, (t _{RTPmin}), Least Significant Byte	7500ps	4C
92	SDRAM Minimum Internal Read to Precharge Command Delay Time, (t _{RTPmin}), Most Significant Byte	7500ps	1D
93	SDRAM Minimum Internal Read to Precharge Command Delay Time, (t _{RTPmin}), Lower Clock Limit	12nCK	0C
94~127	Reserved -- must be coded as 0x00	Reserved	00
128~191	Reserved for future use	Reserved	00
192	SPD Revision for SPD bytes 192~447	Revision 1.0	10
193	Hashing Sequence	No authentication	00
194	SPD Manufacturer ID Code, First Byte	IDT (Renesas)	80
195	SPD Manufacturer ID Code, Second Byte	IDT (Renesas)	B3
196	SPD Device Type	IDT (Renesas)	80
197	SPD Device Revision Number	IDT (Renesas)	21
198	PMIC 0 Manufacturer ID Code, First Byte	IDT (Renesas)	80
199	PMIC 0 Manufacturer ID Code, Second Byte	IDT (Renesas)	B3
200	PMIC 0 Device Type	IDT (Renesas)	80
201	PMIC 0 Revision Number	IDT (Renesas)	40
202	PMIC 1 Manufacturer ID Code, First Byte	N/A	00
203	PMIC 1 Manufacturer ID Code, Second Byte	N/A	00
204	PMIC 1 Device Type	N/A	00

205	PMIC 1 Revision Number	N/A	00
206	PMIC 2 Manufacturer ID Code, First Byte	N/A	00
207	PMIC 2 Manufacturer ID Code, Second Byte	N/A	00
208	PMIC 2 Device Type	N/A	00
209	PMIC 2 Revision Number	N/A	00
210	Thermal Sensor Manufacturer ID Code, First Byte	IDT (Renesas)	80
211	Thermal Sensor Manufacturer ID Code, Second Byte	IDT (Renesas)	B3
212	Thermal Sensor Device Type	IDT (Renesas)	C0
213	Thermal Sensor Revision Number	IDT (Renesas)	12
214	DRAM Specification Level	Reserved	00
215	SPD Specification Level	N/A	00
216	PMIC0 Specification Level	N/A	00
217	PMIC1 Specification Level	N/A	00
218	PMIC2 Specification Level	N/A	00
219	TS Specification Level	N/A	00
220	DIMM Specification Level	N/A	00
221~229	Reserved	Reserved	00
230	Module Nominal Height	31 < height <= 32 mm	11
231	Module Maximum Thickness	Front 2 < thickness <= 3 mm, back 1 < thickness <= 2 mm	21
232	Reference Raw Card Used	R/C D rev 0	03
233	DIMM Attributes	Tc 0 to +95 °C, 1row	81
234	Module Organization	Symmetrical 1 Package Rank	00
235	Memory Channel Bus Width	2 channels, 32 bits per channel, 8 bits ECC	32
236~239	Reserved	Reserved	00
240	Registering Clock Driver Manufacturer ID Code, First Byte	IDT (Renesas)	80
241	Registering Clock Driver Manufacturer ID Code, Second Byte	IDT (Renesas)	B3
242	Register Device Type	IDT (Renesas)	80
243	Register Revision Number	IDT (Renesas)	33
246	Data Buffer Device Type	N/A	00
247	Data Buffer Revision Number	N/A	00
248	RCD-RW08 Clock Driver Enable	Enabled	00
249	RCD-RW09 Output Address and Control Enable	Enabled	00
250	RCD-RW0A QCK Driver Characteristics	Normal	2E
251	RCD-RW0B	Normal	4E
252	RCD-RW0C QxCA and QxCS_n Driver Characteristics	Normal	55
253	RCD-RW0D Data Buffer Interface Driver Characteristics	Normal	00
254	RCD-RW0E QCK, QCA and QCS Output Slew Rate	Normal	01
255	RCD-RW0F BCK, BCOM, and BCS Output Slew Rate	Normal	00
256	DB-RW86 DQS RTT Park Termination	Normal	00
257~447	Reserved	Reserved	00

448~509	Reserved for future use	Reserved	00
510~511	CRC for SPD bytes 0~509	CRC	28 95
512	Module Manufacturer ID Code, First Byte	Advantech	8A
513	Module Manufacturer ID Code, Second Byte	Advantech	C8
514	Module Manufacturing Location		02
515~516	Module Manufacturing Date		-
517~520	Module Serial Number		-
521~550	Module Part Number	SQR-RD5N16G4K8SZZB	53 51 52 2D 52 44 35 4E 31 36 47 34 4B 38 53 5A 5A 42 20 20 20 20 20 20 20 20 20 20 20 20
551	Module Revision Code		00
552	DRAM Manufacturer ID Code, First Byte	Samsung	80
553	DRAM Manufacturer ID Code, Second Byte	Samsung	CE
554	DRAM Stepping		00
555~639	Manufacturer's Specific Data		-
640~703	End User Programmable	Reserved	00
704~767	End User Programmable	Reserved	00
768~831	End User Programmable	Reserved	00
832~895	End User Programmable	Reserved	00
896~959	End User Programmable	Reserved	00
960~1023	End User Programmable	Reserved	00

Appendix: Part Number Table

Product	Advantech PN
SGRAM 16GB R-DDR5-4800 2Gx8 Samsung B DIE (0~95)	SQR-RD5N16G4K8SZZB